
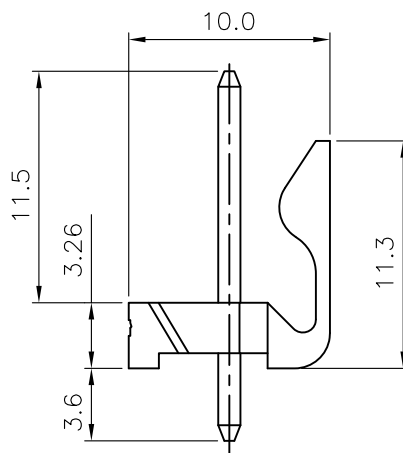
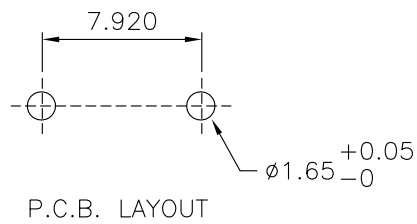
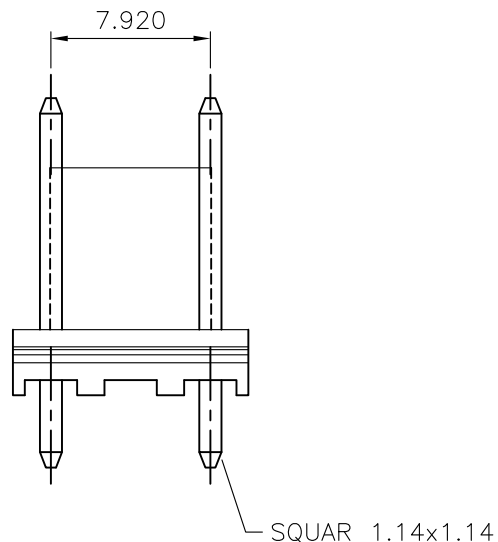


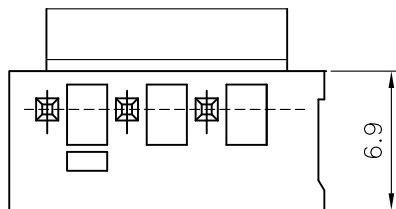

CONNECTOR

Poles: 2

Material: Post: Brass, Tin/Plated

Base: Nylon 66, UL94V-0

SPECIFICATIONS

Voltage rating: AC,DC, 250V

Current rating: AC,DC, 7A

Withstand voltage: AC 1000V/min

Insulation resistance: 1000M Ω max.

Temperature range: -25°C~+85°C

Withstand Temperature: 250°C Max.

Solder Temperature: 235°C as 3 sec.

Applicable PC board thickness: 1.6mm

Contact resistance: Initial value/10m Ω max.

After environmental
Testing/20m Ω max.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.25
.XX $\pm$ 0.15
.XXX $\pm$ 0.05
ANG $\pm$

照片框

ORDER INFORMATION

KT-DEE-02-LF
SERIES | LEADFREE
02 WAY
EMPTY EVEN
DIP180°

DESCRIPTION: Pitch 3.96mm Straight Type P.C.B. Connector