

Features:

- 2 ~ 24 circuits available
- Material : UL 94V-0 nylon 66
- Tin-plated brass pin. Plating options available
- .045"(1.14mm) square pin




Specification:

- Current rating: 7A AC, DC
- Voltage rating: 250V AC, DC
- Contact resistance: 10m Ω Max.
After environmental testing/20m Ω Max.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C

Dimensional Information (mm)

Circuits	Dim. A	Dim. B
N	3.96 x (N - 1)	3.96 x N

&& N = 2 ~ 24

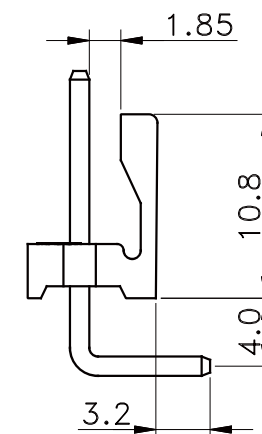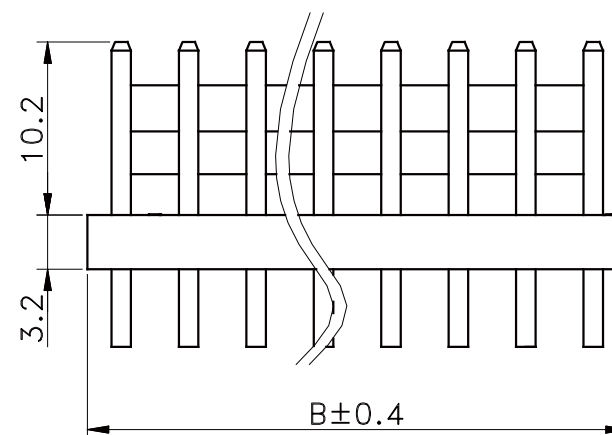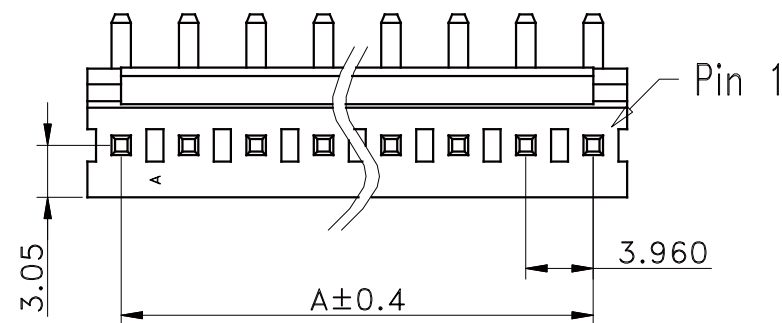

P. C. board layout

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$
.X $\pm$ 0.40
.XX $\pm$ 0.25
.XXX $\pm$ 0.10
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

KT-RV-xx-LF
SERIES LEADFREE
02~24WAY
REVERSED
DIP 90°

DESCRIPTION: