
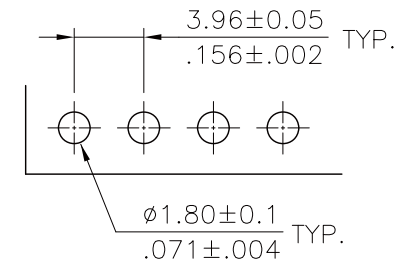
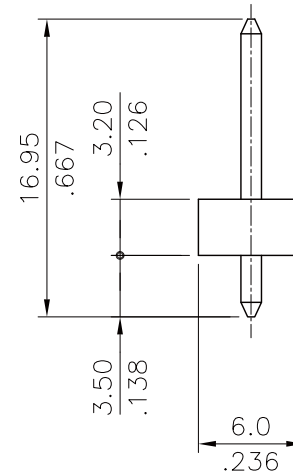


Material:

- * Insulation: Glass filled polyester UL 94V-0
- * Contact: Brass

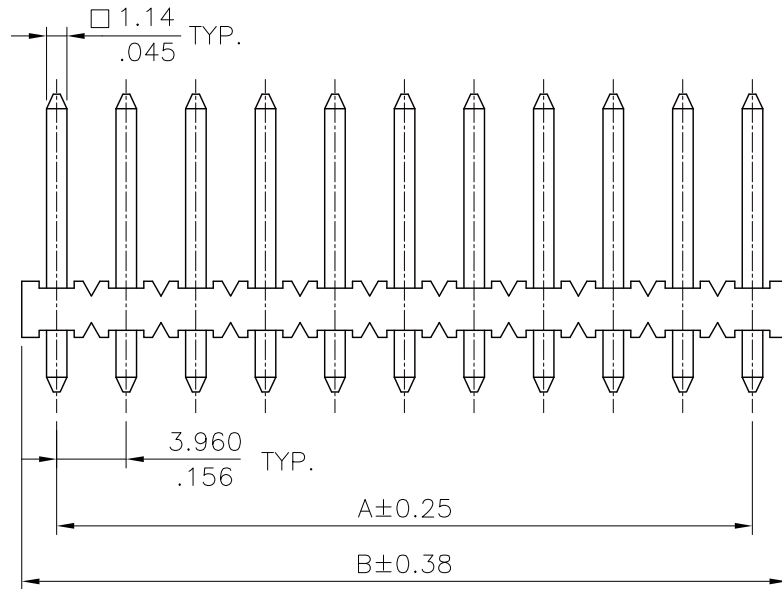

Recommended P.C. Board Layout

$A = 3.96 * \text{No. of Spaces}$

$B = A + 3.96$

* Available in 2 through 20 circuits

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1:1

.XX ±

DATE

.XXX ±

ANG ±

照片框

ORDER INFORMATION

KX-DB-xx-LF
SERIES | LEADFREE
02-20WAY
BREAKAWAY
DIP 180°

煜倫股份有限公司

www.morethanall.com

SIZE A4

PJECTION

DESCRIPTION: