

POSITION	A	B	C
10	10.16	32.00	21.84
14	15.24	37.08	26.92
16	17.78	39.62	29.46
20	22.86	44.70	34.54
24	27.94	49.78	39.62
26	30.48	52.32	42.16
30	35.56	57.40	47.24
34	40.64	62.48	52.32
40	48.26	70.10	59.94
50	60.96	82.80	72.64
60	73.66	95.50	85.34
64	78.74	100.58	90.42

SPECIFICATIONS:

Material:

Insulator: PBT, rated UL94V-0

Insulator: Color Black

Contacts: Brass

Plating:

Gold Flash over Nickel underplate overall

Electrical:

Operating voltage: 250 VAC max

Current rating: 1 Amp max

Contact resistance: 20 mohms max

Insulation resistance:

5,000 Mohms min 500 VDC

Dielectric withstanding voltage:

1,000 VAC for 1 minute

Temperature Rating:

Operating temperature: -55° to +105°


Environmental:

Lead free, RoHS compliant

Recommended soldering temp:

200° for 5 seconds

Recommended PCB Layout

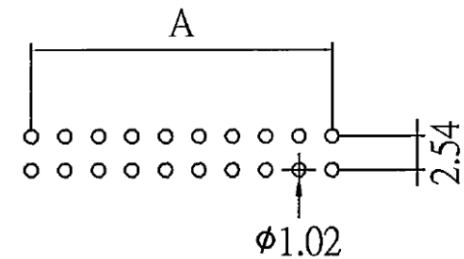

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

L-DS-xx-LF
SERIES | LEADFREE
10-64 WAY
SHORT LATCH
DIP 180°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 勾勾牛角2.54 / 180° 全金 / 短耳