

CONTACTS	60 pin
A	95.60
B	73.66
C	81.82

Current Rating Voltage: 3 Amps 250V AC (r.m.s)

Insulator Resistance: 5000 Megohms min

Contact Resistance: 20 m ohms max.

Dielectric Withstanding: 1000 V AC

Operating Temperature: - 40° ~ +105° C

Contact Material: Copper Alloy

Standard: Brass

Insulator Material: Polyester, UL 94V-0

Standard: PBT



Finish: Standard: Gold Flash all over

Insulator Material: High Temperature


Polyester, UL 94V-0

Max Processing Temp: 230° C for 60 seconds

Max Processing Temp: 260° C for 10 seconds

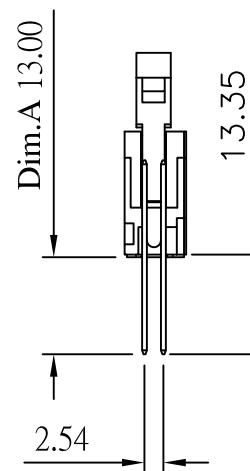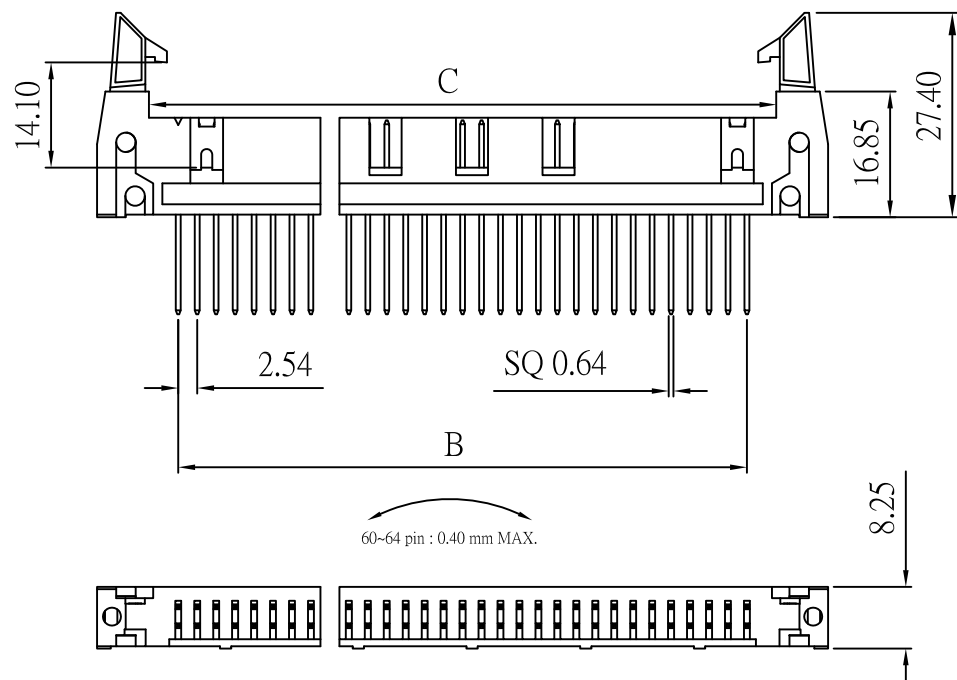

Recommended P.C. Board
Hole Layout

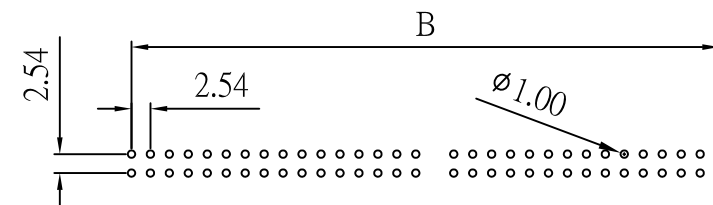

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ± 0.10

ANG ± 1°

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

L-DW13-60-LF
SERIES LEADFREE
60WAY
LONG 13.35mm
WIRE WRAP
DIP 180°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: