

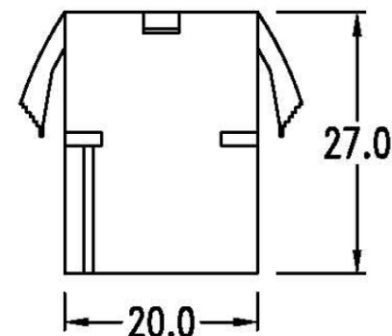


Features:

- Material: UL 94V-2 nylon
- Integrally molded polarization
- Accepts .079"(2.0mm) crimp type terminal
- Positive locking

Specifications:

- Current rating: 10A AC, DC
- Voltage rating: 300V AC, DC
- Insulation resistance: 1000M Ω min.
- Dielectric withstanding voltage: 1500V AC/minute
- Temperature range: -25°C ~ 90°C
- Applicable panel thickness: .031" ~ .079"
(0.8 ~ 2.0mm)

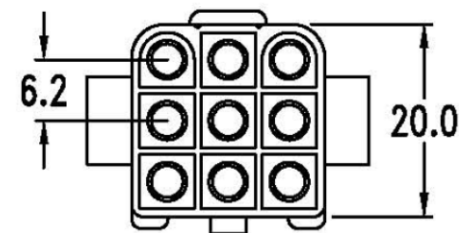

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

ORDER INFORMATION

L-PE-3X03LF
SERIES | LEADFREE
EAR | 09 WAY
MALE

DESCRIPTION: