

SPECIFICATIONS

Circuit:1,2,3,4,6,9,12,15

Voltage rating:300V AC,DC



Current rating:12A AC,DC

Withstanding voltage:1500V AC/minute

Insulation resistance:1000M OHM min

Temperature range:-25°C~+90°C

Material:UL94V-2 Nylon 66

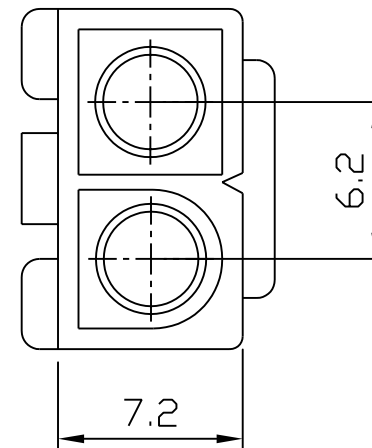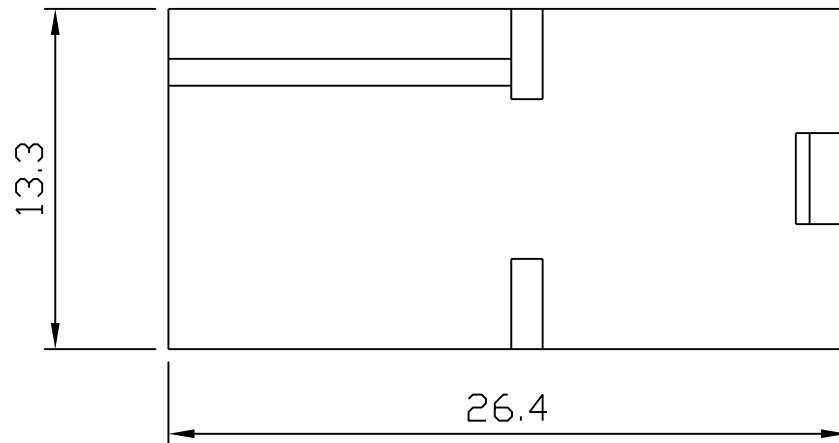

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

L-PX-1X02-LF
SERIES | LEADFREE
NON POST
MALE

DESCRIPTION: