



Recommended P.C. Board  
Hole Layout

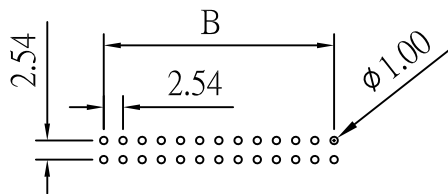

10P.12P.14P.16P

Current Rating Voltage: 3 Amps 250V AC (r.m.s)  
 Insulator Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms max.  
 Dielectric Withstanding: 1000 V AC  
 Operating Temperature: - 40° ~ +105° C  
 Contact Material: Copper Alloy  
                   Standard: Brass  
 Insulator Material: Polyester, UL 94V-0  
                           Standard: PBT  
 Finish: Standard: Gold Flash all over  
 Insulator Material: High Temperature  
                           Polyester, UL 94V-0  
 Max Processing Temp: 230° C for 60 seconds  
 Max Processing Temp: 260° C for 10 seconds

CONTACTS	10 pin	12 pin	14 pin	16 pin	20 pin	24 pin
A	31.90	34.44	36.98	39.52	44.60	49.68
B	10.16	12.70	15.24	17.78	22.86	27.94
C	18.00	20.54	23.08	25.62	30.70	35.78
⊙: D	NO	NO	NO	NO	YES	YES
E	27.92	30.46	33.00	35.54	40.62	45.70
CONTACTS	26 pin	30 pin	34 pin	40 pin	50 pin	
A	52.15	57.40	62.38	70.00	82.70	
B	30.48	35.56	40.64	48.26	60.96	
C	38.32	43.40	48.48	56.10	68.80	
⊙: D	YES	YES	YES	YES	YES	
E	48.24	53.32	58.40	66.02	78.72	

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X, ±  
X ± 0.30  
.XX ± 0.20  
.XXX ± 0.10  
ANG ± 1°

照片框

ORDER INFORMATION

L-RGE-xx-LF  
SERIES | LEADFREE  
          | 10~24 WAY  
          | GRAY  
          | DIP 90°

DESCRIPTION: