

Specifications

Current Rating:3.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:20m Ohm. Max
 Insulation Resistance:1000M Ohm. Min
 Withstanding Voltage:600V AC For One Minute
 Operating Temperature Range : -40°C To +105°C

Material:


Plastic:PBT (UL94V-0)
 Standard Color:Black
 Terminal:Copper Alloy
 Plating:Gold Plated

Notes:

No. of Positions 50~60 With Three Key ; All Other Positions With one key.

No. of Positions	Dim A	Dim B	No. of Positions	Dim A	Dim B	Note
10	32.00	10.16	34	62.48	40.64	
14	37.08	15.24	40	70.10	48.26	
16	39.62	17.78	44	75.18	53.34	
20	44.70	22.86	50	82.80	60.96	1K&3K
24	49.78	27.94	60	95.50	73.66	1K&3K
26	52.32	30.48				
30	57.40	35.56				

	C	D
Short Ejector	4.20	7.50
Long Ejector	7.70	10.80

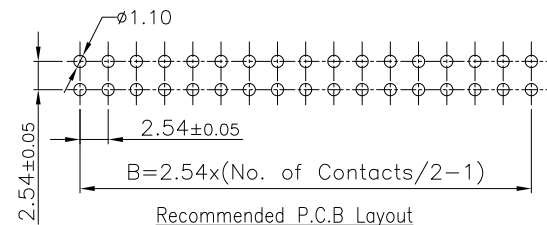

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

X. ±
 .X ± 0.20
 .XX ± 0.15
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

L-Rx-xx-LF
 SERIES | LEADFREE
 10-60 WAY
 BLANK:LONG LATCH
 S:SHORT LATCH
 DIP 90°

DESCRIPTION: 2.54mm Shrouded Header R/A Type