

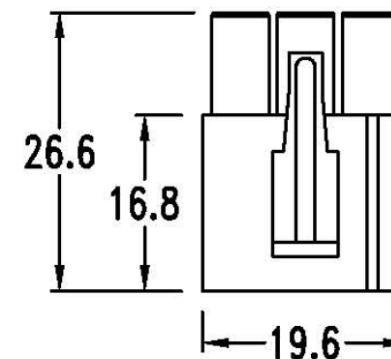


## Features:

- Material: UL 94V-2 nylon
- Integrally molded polarization
- Accepts .079"(2.0mm) crimp type terminal
- Positive locking

## Specifications:

- Current rating: 10A AC, DC
- Voltage rating: 300V AC, DC
- Insulation resistance: 1000M $\Omega$  min.
- Dielectric withstanding voltage: 1500V AC/minute
- Temperature range: -25°C ~ 90°C
- Applicable panel thickness: .031" ~ .079"  
( 0.8 ~ 2.0mm )

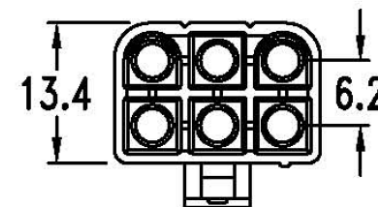

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X.±  
.X±  
.XX±  
.XXX±  
ANG±

照片框

ORDER INFORMATION

L-S-2X03LF  
SERIES | LEADFREE  
06 WAY  
FEMALE

DESCRIPTION: