
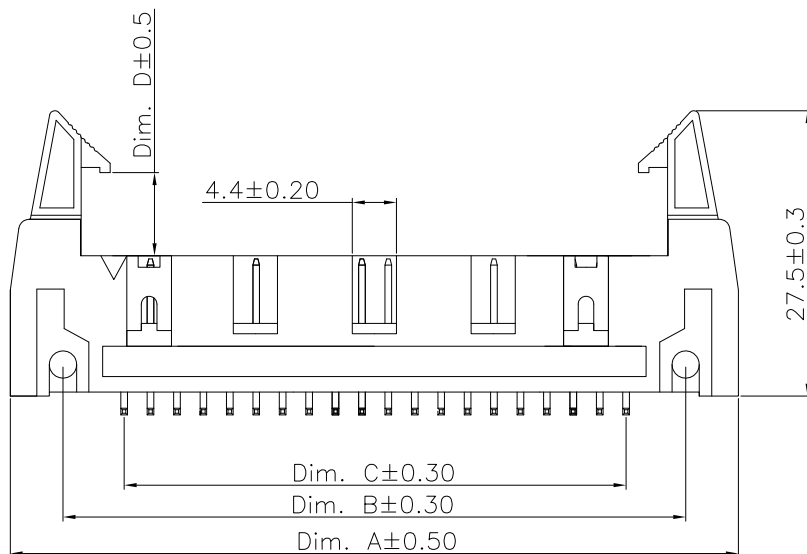
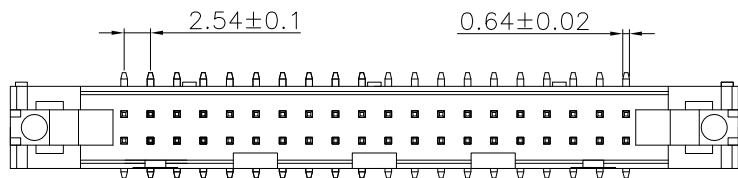


P.C.B Layout

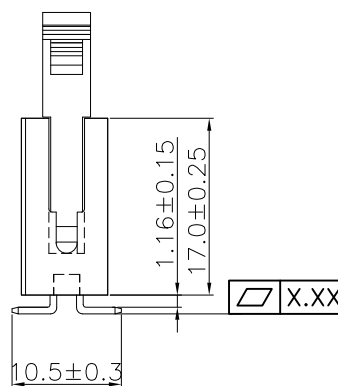

PIN	Flatness
≤ 12P	0.10
≤ 24P	0.12
≤ 40P	0.15
≥ 50P	0.20

	Dim. D
Short Ejector	4.40
Long Ejector	8.50

Specifications

Current Rating:3.0A AC/DC
Voltage Rating:250V AC/DC
Contact Resistance:20m ohm. Max
Insulation Resistance:1000m ohm. Min
Withstanding Voltage:500V AC For one minute
Operating Temperature Range:-40°C to +105°C

Material:

Plastic:High Temp Plastic (Nylon 6T UL94V-0)
Standard Color:Black
Contact:Brass
Plating:Gold or Tin Plated

No. of Contacts	Dim. A	Dim. B	Dim. C
6	26.82	16.68	5.08
8	29.36	19.22	7.62
10	31.90	21.76	10.16
12	34.44	24.30	12.70
14	36.98	26.84	15.24
16	39.52	29.38	17.78
18	42.06	31.92	20.32
20	44.60	34.46	22.86

No. of Contacts	Dim. A	Dim. B	Dim. C
24	49.68	39.54	27.94
26	52.22	42.08	30.48
30	57.30	47.16	35.56
34	62.38	52.24	40.64
40	70.00	59.86	48.26
50	82.70	72.56	60.96
60	95.40	85.26	73.66
64	100.48	90.34	78.74

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ± 0.25
.XX ± 0.15
.XXX ±
ANG ±

照片框

ORDER INFORMATION

L-Vx-xx-LF
SERIES | LEADFREE
06~64 WAY
BLANK:LONG LATCH
S:SHORT LATCH
180°SMT

DESCRIPTION: 2.54mm Shrouded Header With Ejector SMD Type