

PIN	Flatness
≤ 12P	▭ 0.10
≤ 24P	▭ 0.12
≤ 40P	▭ 0.15
≥ 50P	▭ 0.20


	Dim. D
Short Ejector	4.40
Long Ejector	8.50

Specifications
 Current Rating:3.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:20m ohm. Max
 Insulation Resistance:1000m ohm. Min
 Withstanding Voltage:500V AC For one minute
 Operating Temperature Range:-40°C to +105°C

Material:
 Plastic:High Temp Plastic (Nylon 6T UL94V-0)
 Standard Color:Black
 Contact:Brass
 Plating:Gold or Tin Plated

No. of Contacts	Dim. A	Dim. B	Dim. C
6	26.82	16.68	5.08
8	29.36	19.22	7.62
10	31.90	21.76	10.16
12	34.44	24.30	12.70
14	36.98	26.84	15.24
16	39.52	29.38	17.78
18	42.06	31.92	20.32
20	44.60	34.46	22.86

No. of Contacts	Dim. A	Dim. B	Dim. C
24	49.68	39.54	27.94
26	52.22	42.08	30.48
30	57.30	47.16	35.56
34	62.38	52.24	40.64
40	70.00	59.86	48.26
50	82.70	72.56	60.96
60	95.40	85.26	73.66
64	100.48	90.34	78.74

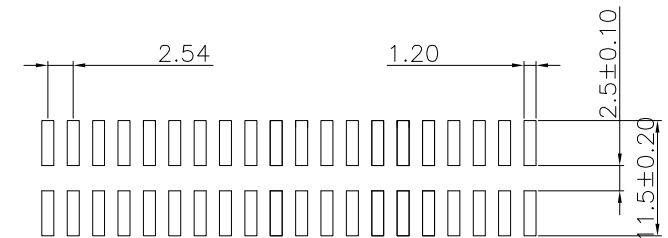

P.C.B Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4 PPROJECTION

X, ±
 .X ± 0.25
 .XX ± 0.15
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

L-VxC-xx-LF
 SERIES | LEADFREE
 | 06-64 WAY
 | CAP
 | BLANK:LONG LATCH
 | S:SHORT LATCH
 | 180°SMT

DESCRIPTION: 2.54mm Shrouded Header With Ejector SMD Type