
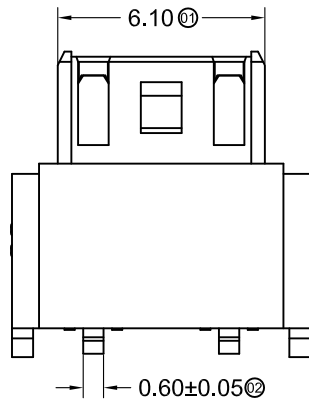
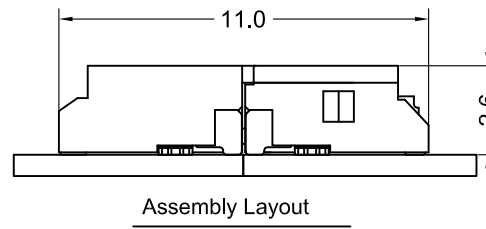
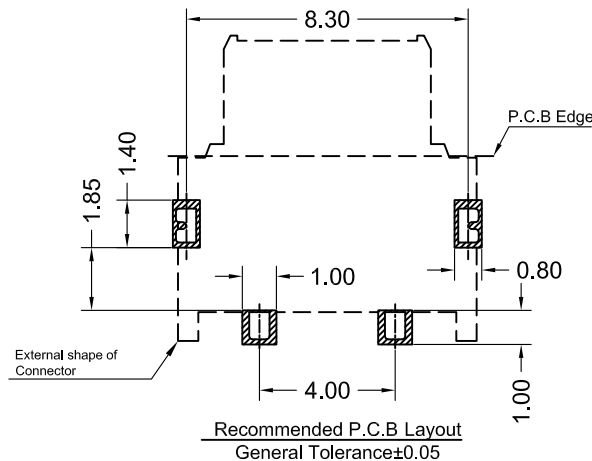
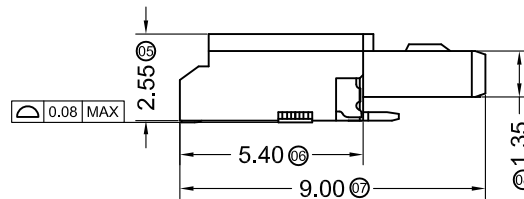


■ Specifications :

- Voltage rating: 300V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 1700V AC/minute
- Temperature range: -55°C~+105°C
- Insulation resistance: $\geq 1000\text{M}\Omega$
- Contact resistance: $\leq 20\text{m}\Omega$
- After environmental testing: $\leq 40\text{m}\Omega$



LEB-PWX-02	LCP UL 94V-0	Phosphor Bronze	Tin-Plated	Brass	Tin-Plated
PART NO	Material	Material(Pin)	Finish(Pin)	Material (Solder Tab)	Finish (Solder Tab)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$ 0.10
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

LEB-PWX-02-LF
SERIES | | | LEADFREE
| | | 02 WAY
| | | NON POST
| | | 90°SMT
| | | MALE

DESCRIPTION: 4.00mm BTB Style Connectors