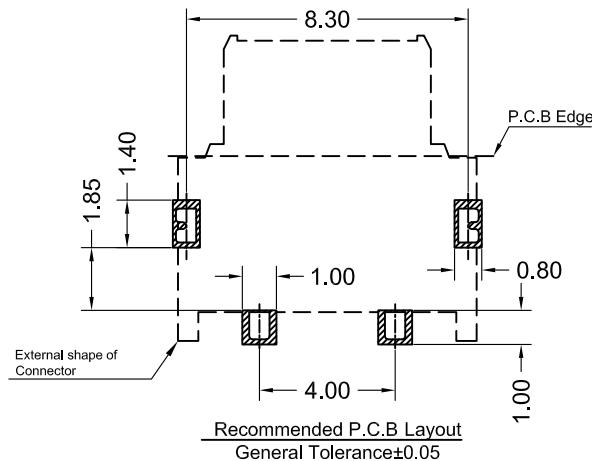
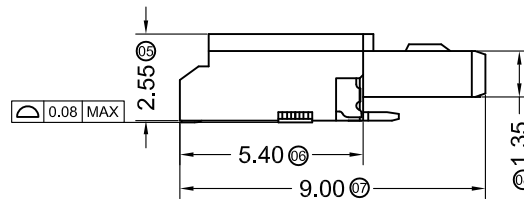

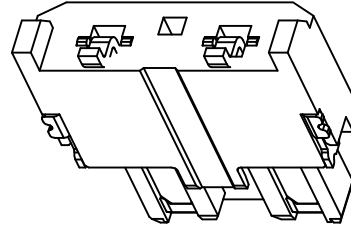
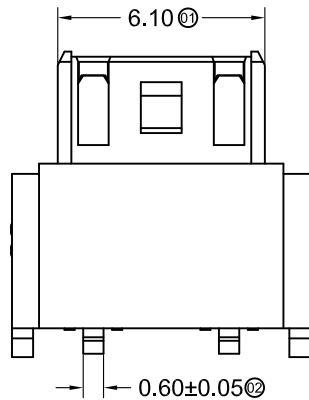


■ Specifications :

- Voltage rating: 300V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 1700V AC/minute
- Temperature range: -55°C~+105°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤40mΩ

LEB-PWXR-02	LCP UL 94V-0	Phosphor Bronze	Tin-Plated	Brass	Tin-Plated
PART NO	Material	Material(Pin)	Finish(Pin)	Material (Solder Tab)	Finish (Solder Tab)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION



LEB-PWXR-02-LF
SERIES T T T T LEADFREE
02 WAY
REEL
NON POST
90°SMT
MALE

DESCRIPTION: 4.00mm BTB Style Connectors

Empty 20 hole
空20穴






Product 1800PCS
21600mm

Leader Part Empty 20 hole.
前空 20穴

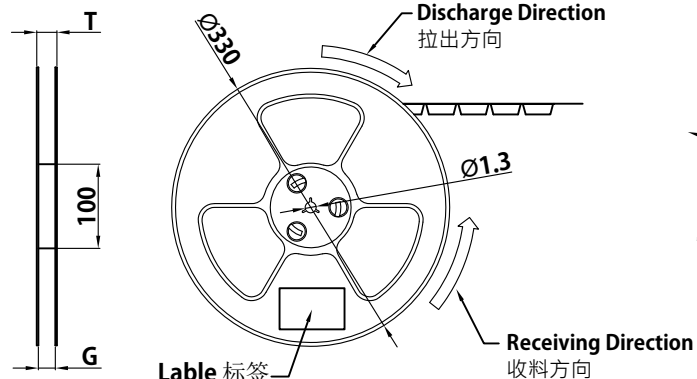

COVER TAPE PEEL STRENGTH:20~120g
上带剥离力量:20~120g

速度 PEEL SPEED:300mm/minute

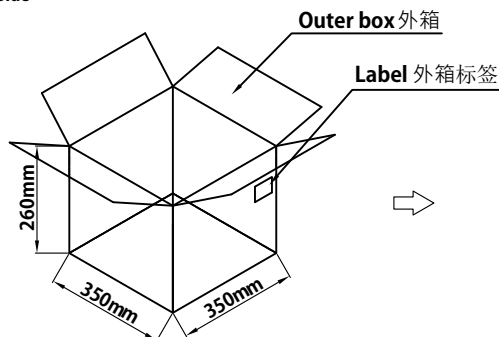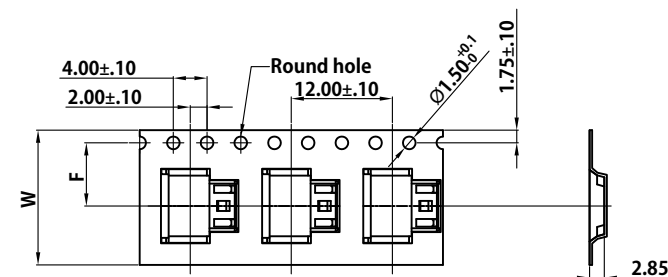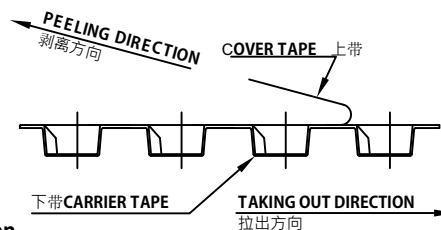

Note:

1. Carrier Camber Is Within 1mm In 100mm ; 带长100mm内容许弯曲度1mm
2. 10 Sprocket Hole Pitch Cumulative Tolerance±0.2MM ; 圆孔十个孔距离累计允许公差为±.2mm
3. Carrier tape material for PS ; 下带材质为PS 材质 ; Color颜色: Black黑色
4. Bracer保护带 : Color颜色:Natural透明色;厚度0.40mm最小
5. Thinkess=0.40±0.05 ; 材料厚度为0.40±.05mm

Part No.	W	S	F	T (MAX)	G (MAX)	REEL /PCS	CARTON /R	CARTON /PCS
LEB-PWXR-02	16	/	7.50	20.50	16.40	1800	12R	21.6K

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

LEB-PWXR-02-LF
SERIES T T T T LEADFREE
02 WAY
REEL
NON POST
90°SMT
MALE

DESCRIPTION: 4.00mm Connectors SMT 90° Package