


Features

- 3.0mmx1.5mm SMT LED, 1.4mm THICKNESS.
- LOW POWER CONSUMPTION.
- WIDE VIEWING ANGLE.
- IDEAL FOR BACKLIGHT AND INDICATOR.
- VARIOUS COLORS AND LENS TYPES AVAILABLE.
- PACKAGE : 2000PCS / REEL.
- RoHS COMPLIANT.

LED-VYL-14-LF
LEADFREE

RoHS Compliant

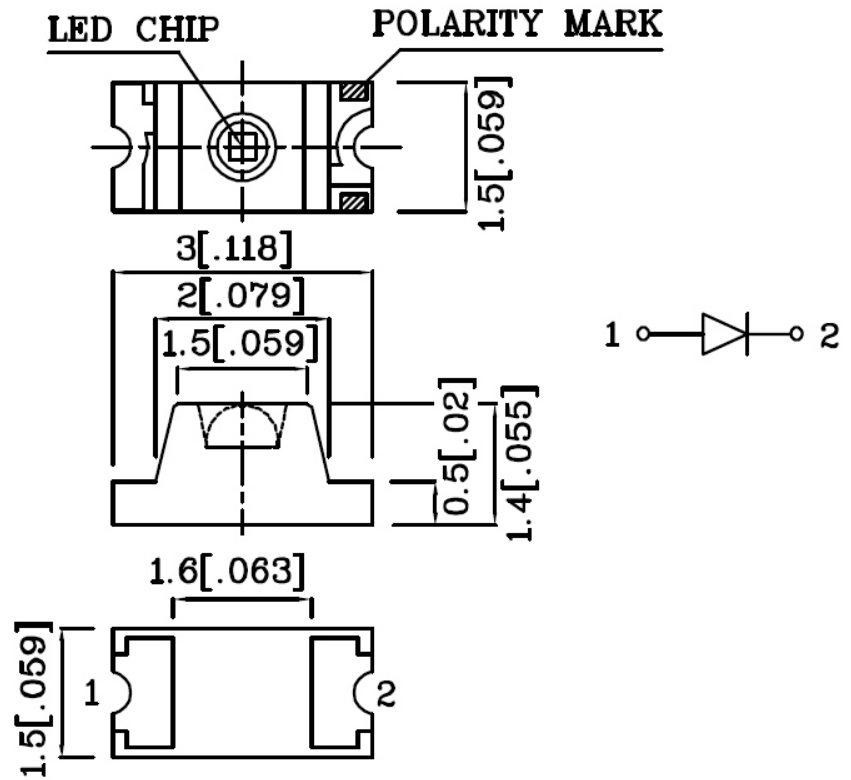

Part Number	Emitting Color	Emitting Material	Lens-color	Luminous Intensity (IF=20mA) mcd		Wavelength nm λ P	Viewing Angle 2θ 1/2
				min.	typ.		
LED-VYL-14	Yellow	InGaAlP	Water Clear	110	278	640	70°

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. **LED-VYL-14**

DWG NO. **LED-VYL-14**

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE



煜倫股份有限公司


Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.2(0.008)$ " unless otherwise noted.


Absolute maximum ratings (TA=25°C)		MD (InGaAlP)	Unit
Reverse Voltage	VR	5	V
Forward Current	IF	30	mA
Forward Current (Peak) 1/10 Duty Cycle 0.1ms Pulse Width	iFS	185	mA
Power Dissipation	PT	170	mW
Operating Temperature	TA	-40 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +85	

Operating Characteristics (TA=25°C)		MD (InGaAlP)	Unit
Forward Voltage (Typ.) (IF=20mA)	VF	1.9	V
Forward Voltage (Max.) (IF=20mA)	VF	2.5	V
Reverse Current (VR=5V)	IR	10	uA
Wavelength of Peak Emission (IF=20mA)	λP	640	nm
Wavelength of Dominant Emission (IF=20mA)	λD	628	nm
Spectral Line Full Width At Half-Maximum (IF=20mA)	$\Delta\lambda$	27	nm
Capacitance (VF=0V, f=1MHz)	C	45	pF


	PART NO. LED-Vxx-14		CHECKED BY CY	TOLERANCES ARE .X \pm 0.2 .XX \pm .XXX \pm AWG	DESCRIP TION:					
	DWG NO. LED-Vxx-14					DRAWING BY	AREA	REVISIONS	HK	DATE
煜倫股份有限公司	FILE NO.		DRAWING BY							
	UNIT / mm	SCALE 1:1	PROJECTION 							

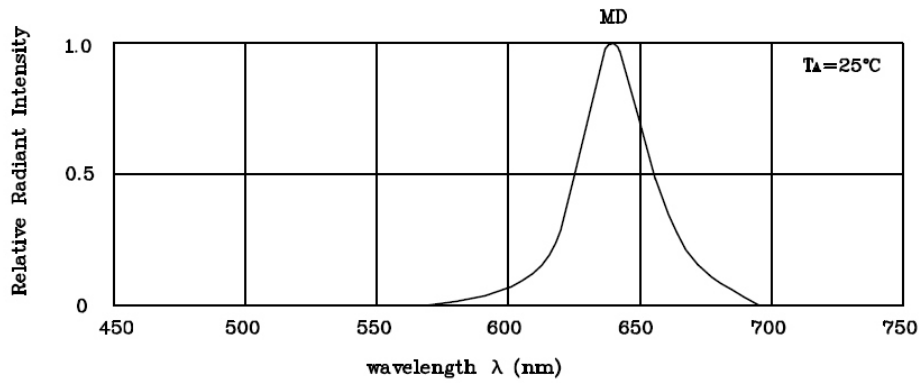


RELATIVE INTENSITY Vs. WAVELENGTH

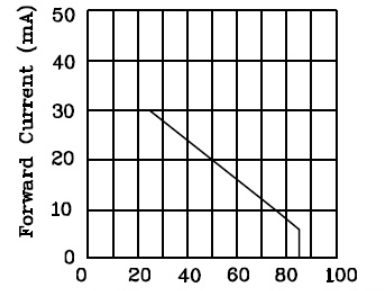


FORWARD CURRENT DERATING CURVE

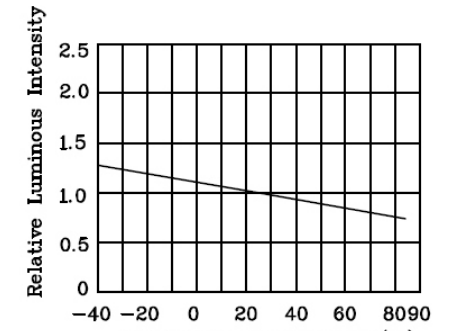


LUMINOUS INTENSITY Vs. AMBIENT TEMPERATURE



FORWARD CURRENT Vs. FORWARD VOLTAGE

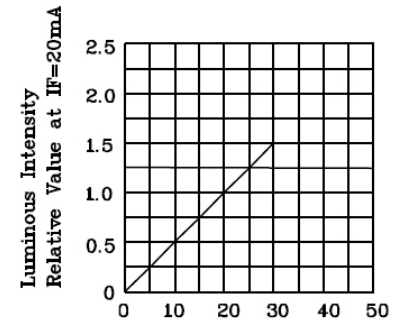

LUMINOUS INTENSITY Vs. FORWARD CURRENT

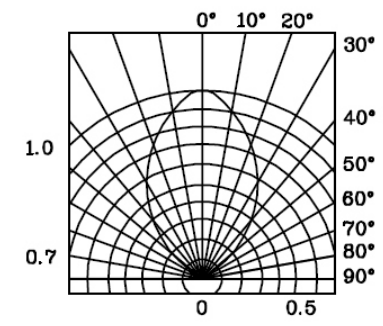

SPATIAL DISTRIBUTION

MORETHANALL
 CONNECTORS
 ASSEMBLIES

PART NO. **LED-Vxx-14**

DWG NO. **LED-Vxx-14**

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION: 3.0mmx1.5mm SMD CHIP LED LAMP

FILE NO.

DRAWING BY

.X \pm 0.2
 .XX \pm
 .XXX \pm
 AWG


AREA	REVISIONS	HK	DATE
------	-----------	----	------

煜倫股份有限公司

UNIT / mm SCALE 1:1

PROJECTION

Reflow Soldering Profile For Lead-free SMT Process.

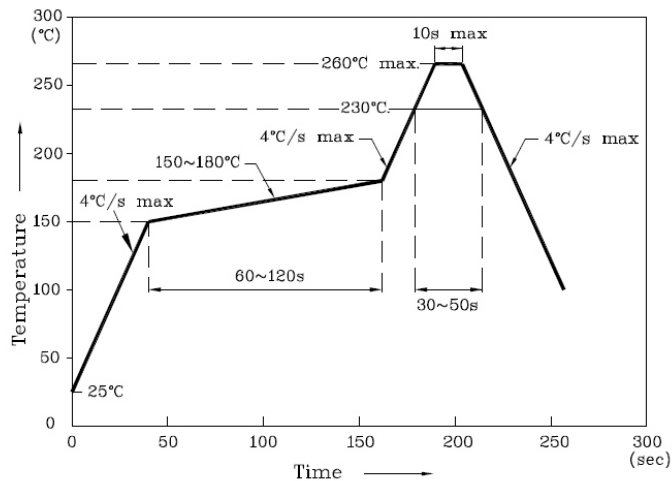

Notes:

1. Maximum soldering temperature should not exceed 260°C.
2. Recommended reflow temperature: 145°C-260°C.
3. Do not put stress to the epoxy resin during high temperatures conditions.


Remarks:

If special sorting is required (e.g. binning based on forward voltage, luminous intensity or wavelength), the typical accuracy of the sorting process is as follows:


1. Wavelength: +/-1nm
2. Luminous Intensity: +/-15%
3. Forward Voltage: +/-0.1V

Note: Accuracy may depend on the sorting parameters.

❖ Tape Specification (Units : mm)

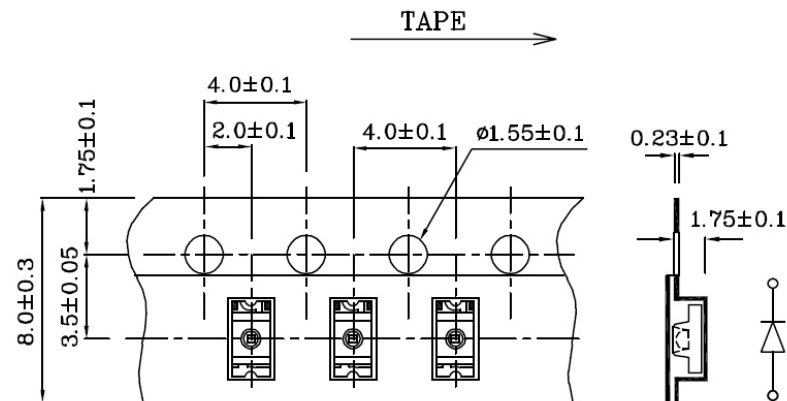

❖ Recommended Soldering Pattern (Units : mm; Tolerance: ± 0.1)

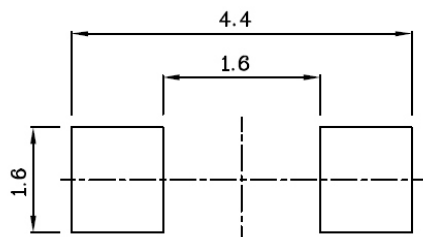

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. LED-Vxx-14

DWG NO. LED-Vxx-14

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

FILE NO.

DRAWING BY

.X ± 0.2
.XX ±
.XXX ±
AWG

AREA

REVISIONS

HK

DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

