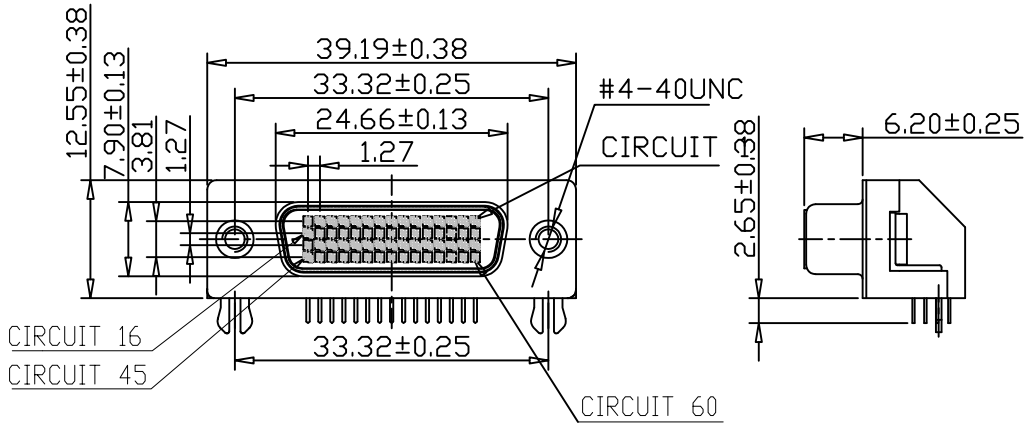

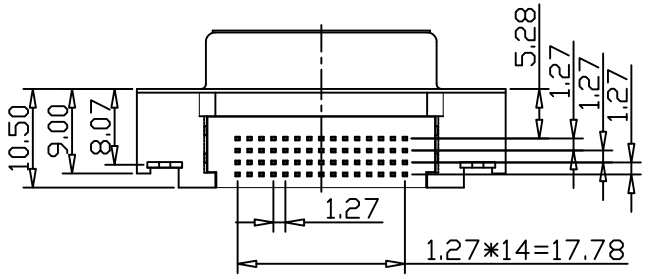

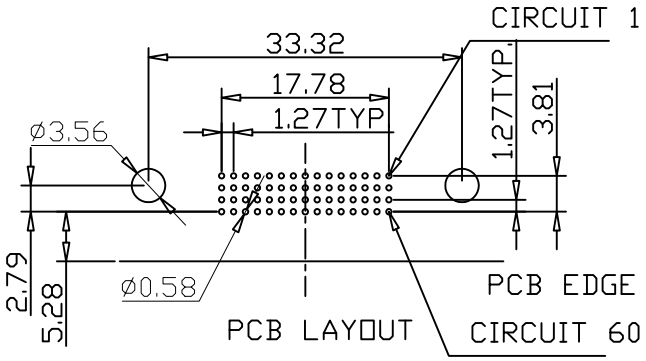

SPECIFICATIONS

ELECTRICL:

Voltage: 40V
Current: 1.0A
Contact Resistance: 40mΩ max
Dielectric Withstanding Voltage:500V
Insulation Resistance:100mΩ min

MECHANICAL:

Contact Insertion Force:60g max
Mating force:50g min
Unmating Force: 20g min
Durability:5000 cycles

Physicl:

Housing:Glass-filled polymer,UL 94V-0
Contact:Beryllium Copper Alloy
Plating:
Terminals-30u'' min. Gold Over Nickel In contact Area, 100u'' min. Tin/Lead Over Nickel In PC Tail Area
Shields-150u''. Bright Tin Over Nickel All Over Copper Flash
Operating Temperature:-20 TO +80°C

RoHS Compliant

MORETHANALL PCB CONNECTORS Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ±
UNIT / mm	SCALE 1 : 1	.X ± 0.25
		.XX ± 0.13
DATE		.XXX ±
		ANG ±
SIZE A4	PPOJECTION	

照片框

ORDER INFORMATION

LFH-SRN-060-LF

SERIES
FEMALE
DIP 90°
NUT
60 WAY
LEADFREE

DESCRIPTION: 1.27mm PITCH LFH™ MATRIX 50, SHIELDED RECEPTACLE 60 CIRCUIT,RIGHT ANGLE