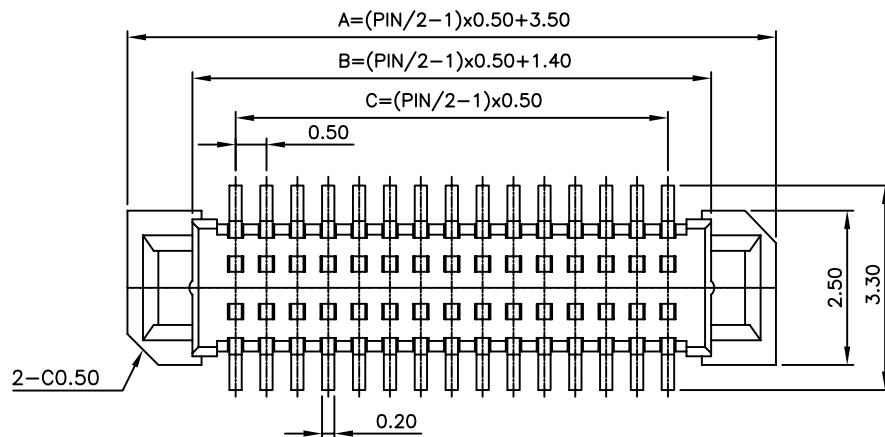




NOTE:

Specifications:

- 1). Current rating:0.5Amps
- 2). Voltage rating:AC,DC50V
- 3). Contact resistance:40mΩ
- 4). Insulation resistance:100MΩ
- 5). Withstanding voltage:AC 500Vr.m.s(for one minute)
- 6). Temperature range:-25°C~+85°C

Material:


- 1). Insulator:LCP UL94V-0
 - 2). Contact:Phosphor Bronze
 - 3). Plating:Gold Plating
- Mating High:1.5/2.0mm

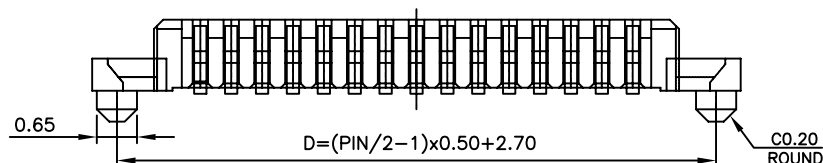

MATED DRAWING (REF)
SCALE : 5 : 1

PIN	A	B	C	D	PIN	A	B	C	D
30P	10.50	8.40	7.00	9.70	100P	28.00	25.90	24.50	27.20
24P	9.00	6.90	5.50	8.20	80P	23.00	20.90	19.50	22.20
22P	8.50	6.40	5.00	7.70	70P	20.50	18.40	17.00	19.70
20P	8.00	5.90	4.50	7.20	60P	18.00	15.90	14.50	17.20
16P	7.00	4.90	3.50	6.20	50P	15.50	13.40	12.00	14.70
14P	6.50	4.40	3.00	5.70	40P	13.00	10.90	9.50	12.20
12P	6.00	3.90	2.50	5.20	36P	12.00	9.90	8.50	11.20
10P	5.50	3.40	2.00	4.70	34P	11.50	9.40	8.00	10.70

Stacking Height Variations	
	LGV-P03P-xxx
LGV-S12P-xxx	1.5
LGV-S17P-xxx	2.0

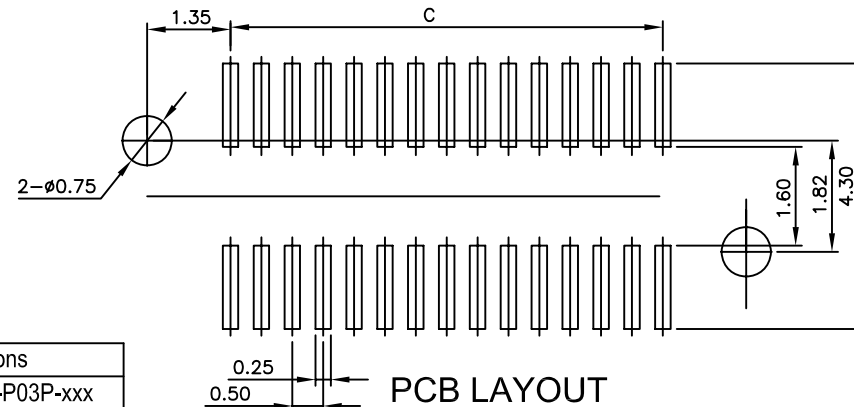

PCB LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

LGV-P03P-xxx-LF
SERIES | T | LEADFREE
010~100WAY
POST
UNMATED HIGH 0.3mm
PLUG

DESCRIPTION: 0.5mm B TO B MALE