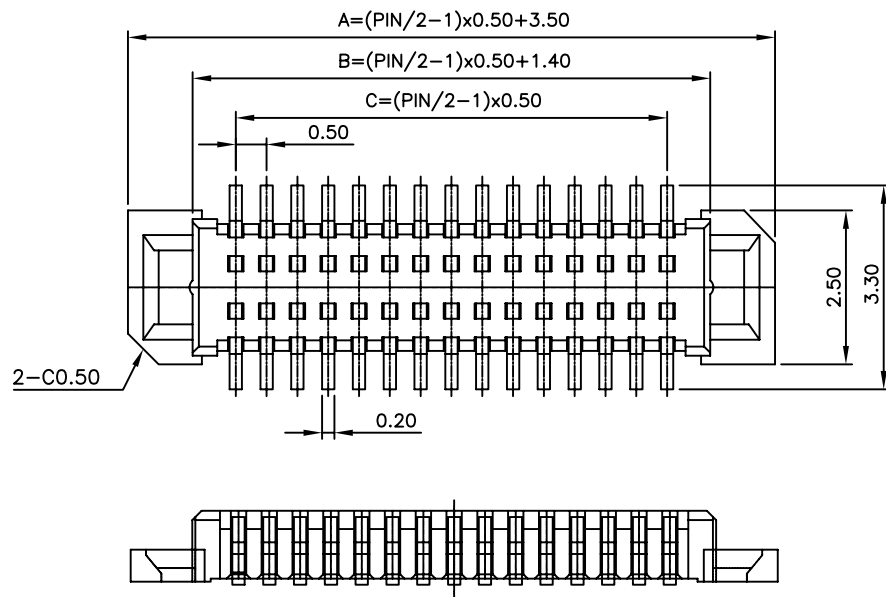


NOTE:


Specifications:

- 1). Current rating: 0.5Amps
- 2). Voltage rating: AC, DC 50V
- 3). Contact resistance: 40mΩ
- 4). Insulation resistance: 100MΩ
- 5). Withstanding voltage: AC 500Vr.m.s (for one minute)
- 6). Temperature range: -25°C ~ +85°C

Material:


- 1). Insulator: LCP UL94V-0
 - 2). Contact: Phosphor Bronze
 - 3). Plating: Gold Plating
- Mating High: 1.5/2.0mm

PIN	A	B	C	D	PIN	A	B	C	D
30P	10.50	8.40	7.00		100P	28.00	25.90	24.50	
24P	9.00	6.90	5.50		80P	23.00	20.90	19.50	
22P	8.50	6.40	5.00		70P	20.50	18.40	17.00	
20P	8.00	5.90	4.50		60P	18.00	15.90	14.50	
16P	7.00	4.90	3.50		50P	15.50	13.40	12.00	
14P	6.50	4.40	3.00		40P	13.00	10.90	9.50	
12P	6.00	3.90	2.50		36P	12.00	9.90	8.50	
10P	5.50	3.40	2.00		34P	11.50	9.40	8.00	
					32P	11.00	8.90	7.50	

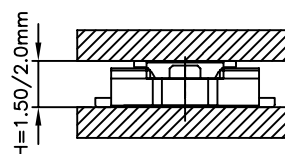

MATED DRAWING (REF)
SCALE : 5 : 1

Stacking Height Variations	
	LGV-P03X-xxx
LGV-S12X-xxx	1.5
LGV-S17X-xxx	2.0

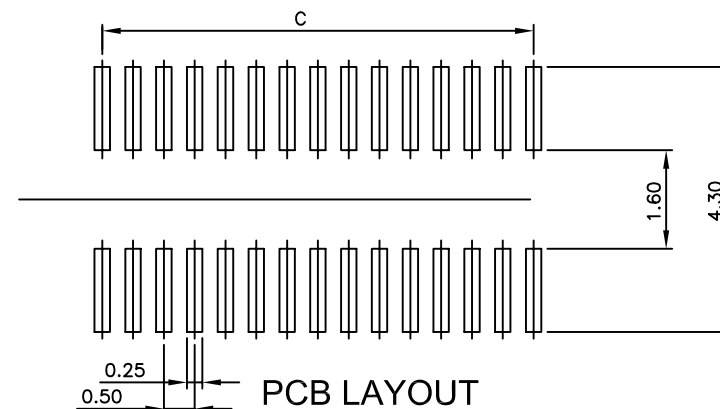

照片框

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

ORDER INFORMATION

LGV-P03X-xxx-LF
 SERIES | LEADFREE
 | 010~100WAY
 | NON POST
 | UNMATED HIGH 0.3mm
 | PLUG

DESCRIPTION: 0.5mm B TO B MALE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com