


Features:

- 2 ~ 12 circuits available
- UL 94V-2 nylon 66
- Molded pull tab
- With locking ramp
- Molded in locking arm for terminal

Specifications:

- Current rating: 7A max.
- Voltage rating: 250V AC max.
- Dielectric strength: 1000V AC/minute
- Insulation resistance: 1000M Ω min.
- Temperature range: -40°C ~ 105°C
(including temperature rise)

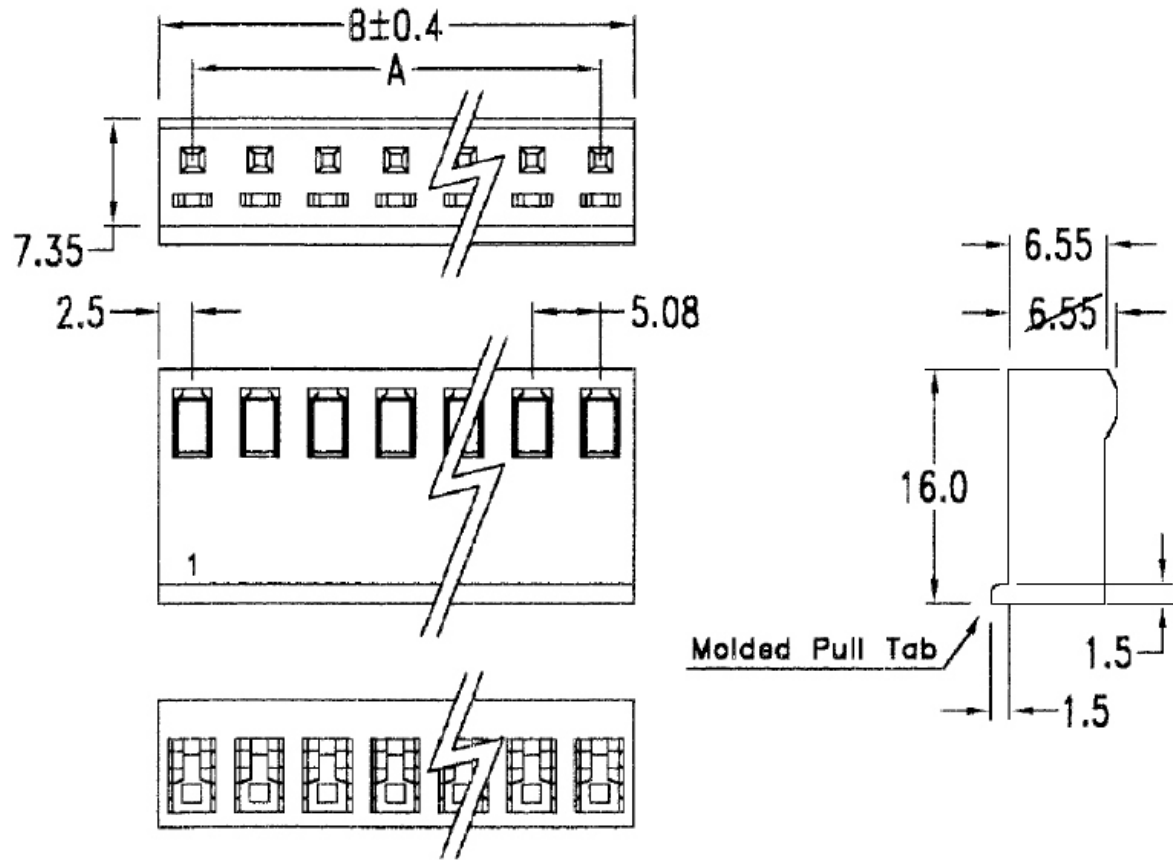

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	5.08	10.33	6	25.40	30.65	10	45.72	50.97
3	10.16	15.41	7	30.48	35.73	11	50.80	56.05
4	15.24	20.49	8	35.56	40.81	12	55.88	61.13
5	20.32	25.57	9	40.64	45.89			

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

LKS-H-xx-LF
SERIES | LEADFREE
02~12WAY
HOUSING

DESCRIPTION: