

Features:





- 4 points contact
- Antu-fishhooking contact design
- Finished: Tin-plated (Lead free)
- Wire range: #28 ~ #22 AWG
- Thickness: 0.25mm
- Q'ty: 5000 PCS / Reel

Specification:

- Current rating: 4 A
- Contact resistance: Initial 10mΩ Max.

Ordering Information

Part No.	Material	Wire range	Dim. a	Dim. b	Dim. c	Dim. d
LKS-T-22	Brass	#28 ~ #22	2.1	1.8	3.2	2.25
	Phosphor bronze					

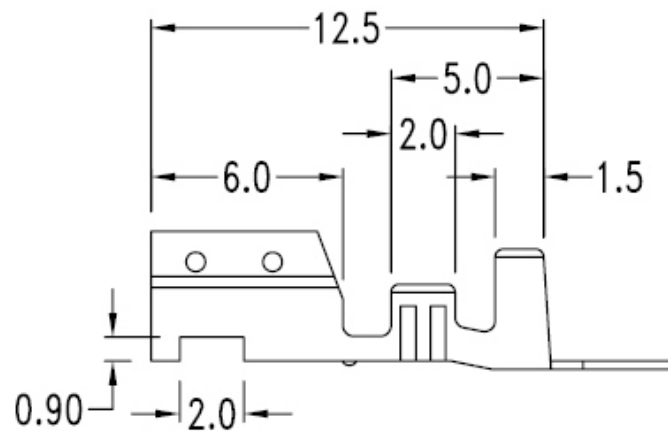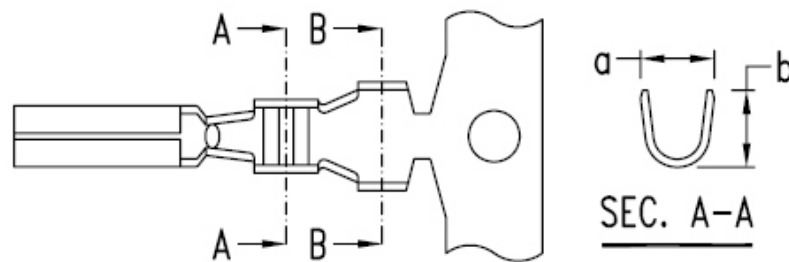

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫股份有限公司

PART NO. **LKS-T-22**

DWG NO. **LKS-T-22**

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2

.XX ±

.XXX ±

AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE