

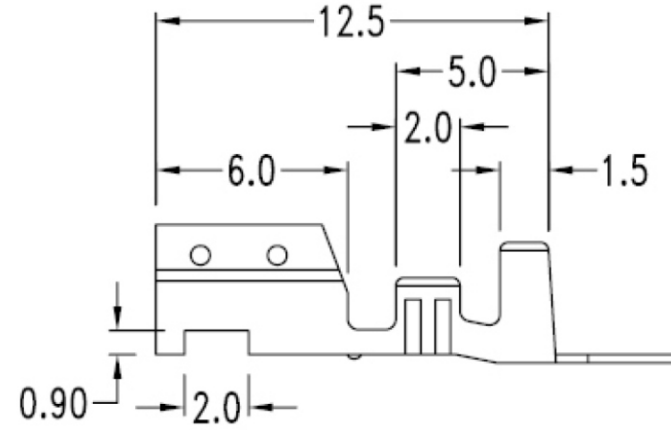



## Features:

- 4 points contact
- Antu-fishhooking contact design
- Finished: Tin-plated ( Lead free )
- Wire range: #16 ~ #22 AWG
- Thickness: 0.25mm
- Q'ty: 5000 PCS / Reel

## Specification:

- Current rating: 7A
- Contact resistance: Initial 10mΩ Max.

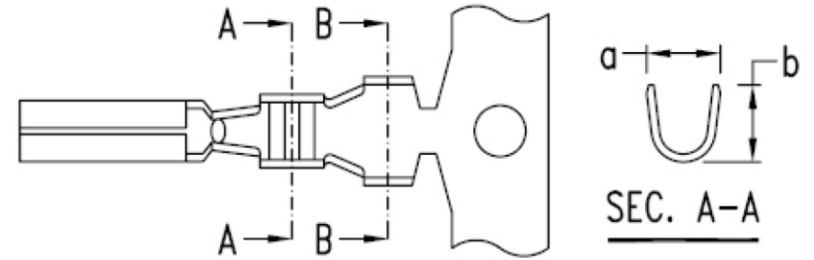

## Ordering Information

Part No.	Material	Wire range	Dim. a	Dim. b	Dim. c	Dim. d
LKS-T-18	Brass	#18 ~ #22	2.3	2.4	3.5	3.6
	Phosphor bronze					
LKS-T-16	Brass	#16 ~ #18	2.45	2.4	4.0	3.9
	Phosphor bronze					

### RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



### ORDER INFORMATION

LKS-T-xx-LF  
SERIES | LEADFREE  
18:18-22AWG  
16:16-18AWG  
TERMINAL

DESCRIPTION: