

Parameter

- Switch Rating: 5A 250VAC
- Contact Resistance: $\leq 50m\Omega$
- Insulation Resistance: $\geq 100M\Omega$
- Mechanical Life: 100,000 times
- Electrical Life: 10,000 times
- Environment Temp: $-20^{\circ}C \sim +55^{\circ}C$
- Protection Grade: IP67 IK10
- Structure: 1NO 1NC 1COM
- Operation: Self-Locking/Momentary

Material

- Button: As ordering code
- Body: As ordering code
- Contact: Silver Alloy
- Terminal: Brass plating silver
- Bace: PA66

RoHS Compliant

TOLERANCES ARE




煜倫股份有限公司

www.morethanall.com

DRAWING BY CY		X, ± .X ± 0.30 .XX ± 0.15 .XXX ± ANG ± 2°
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PPOJECTION	



ORDER INFORMATION

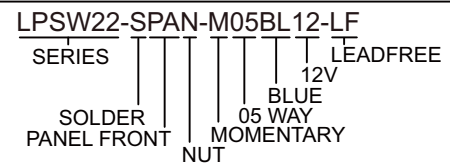

DESCRIPTION: Push Button Switch