



XX表示LED顏色

xx	LED Color
RD	RED
YL	YELLOW
GR	GREEN
BL	BLUE
WH	WHITE

**Note:**  
**Electrical Characteristics:**  
 Rating : 0.1A 30VDC  
 Contact Resistance : 50mΩ max.(initial)  
 Insulation Resistance : 100MΩ min.  
 Dielectric Strength : AC 500V (50/60Hz for 1 minute).  
**Mechanical**  
 Full Travel : 1.5mm  
 Operating Life : 10,000 cycles min.  
 Operating Temperature : -10°C to 80°C  
 Operating Force : 150gf±100gf

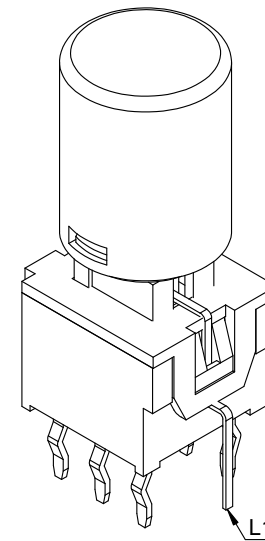

P.C.B LAYOUT  
Top view

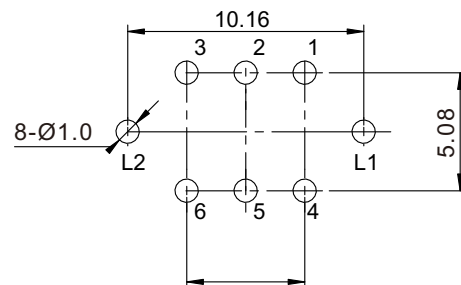

General tolerances±0.1mm

Type	Switch Action		Circuit
B Series	Normal ON	Push (ON)	
Connection Terminal	1 - 2	2 - 3	
	4 - 5	5 - 6	
LED Circuit			

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

X, ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG ±

照片框

ORDER INFORMATION

LPSW786-DM186xx-150-LF

SERIES

LEADFREE

150gf

RD:RED

WH:WHITE

DIP 180°

HIGHLY 18.6mm

METAL FOOT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: