
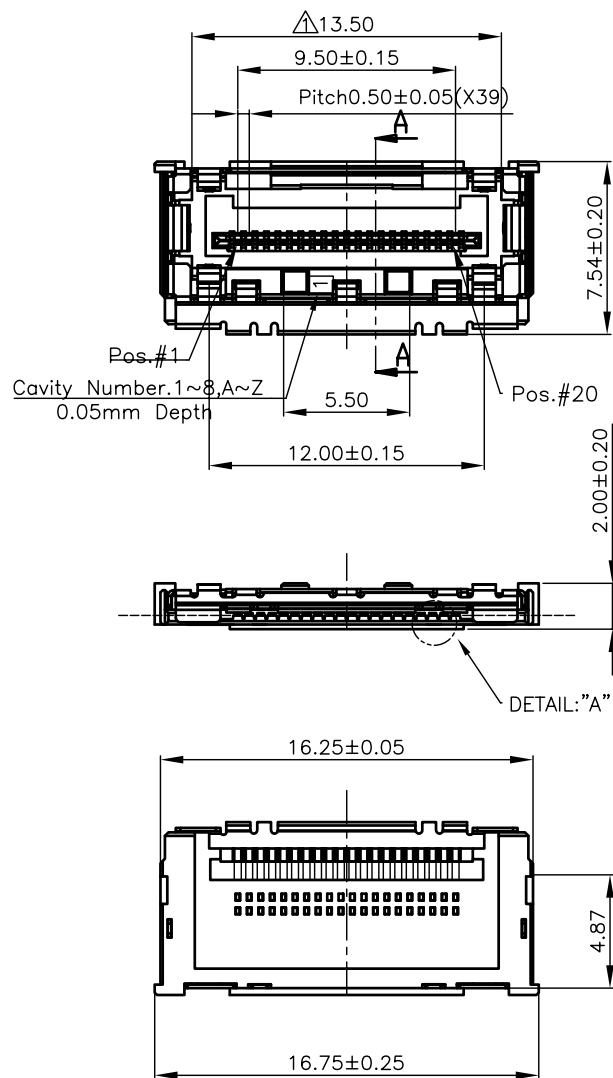


SECTION: A--A (2:1)

NOTE:

1. MATERIAL- INSULATOR: LCP, UL94-V0, BLACK
INNER SHELL: COPPER ALLOY.
CONTACT: COPPER ALLOY
2. FINISH - CONTACT 1~3u" GOLD ON CONTACT AREA
GOLD FLASH ON OTHER AREA, BOTH OVER NICKEL.
3. FINISH - INNER SHELL : M=TIN 80u"(MATTE) OVER 50u" NICKEL.
4. OUTER SHELL MATERIAL&FINISH SEE PAGE 2(NOTE)
5. TFL:32~36AWG
COAXIAL:36AWG~46AWG

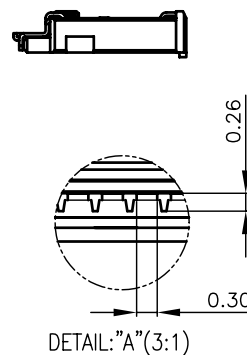

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.35

.X ± 0.25

.XX ± 0.15

.XXX ± 0.05

ANG $\pm 3^\circ$




PPOJECTION

照片框




ORDER INFORMATION

LVC-HS32-20-LF
SERIES | | | LEADFREE
| | | 20WAY
| | | 32~36AWG
| | | SOLDER
| | | HOUSING

DESCRIPTION:

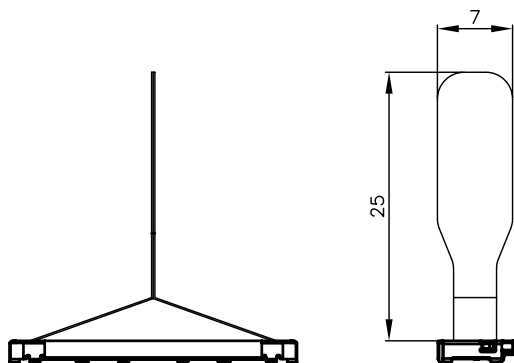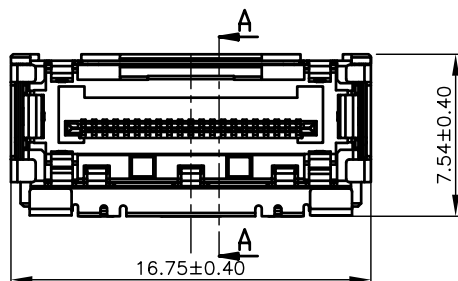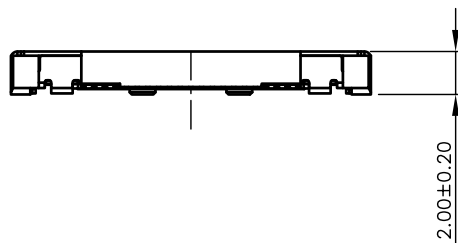

PULL TAB INSTALLATION CONDITION(2:1)

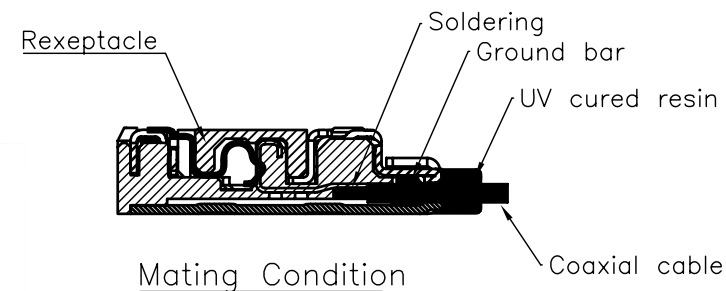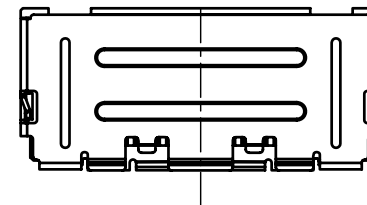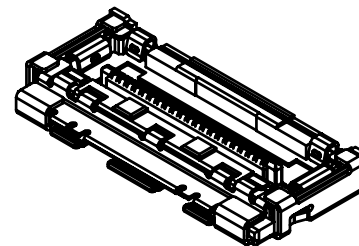

Mating Condition

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. ± 0.35

.X ± 0.25

.XX ± 0.15

.XXX ± 0.05


ANG ± 3°

PPOJECTION


ORDER INFORMATION

LVC-HS32-20-LF
SERIES | 20WAY | LEADFREE
32~36AWG
SOLDER
HOUSING

DESCRIPTION:

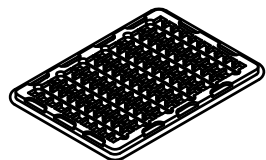


TOP TRAY COVER

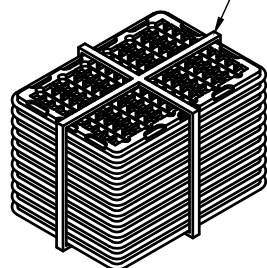

SHRINK TAPE

TRAY
25 LAYER

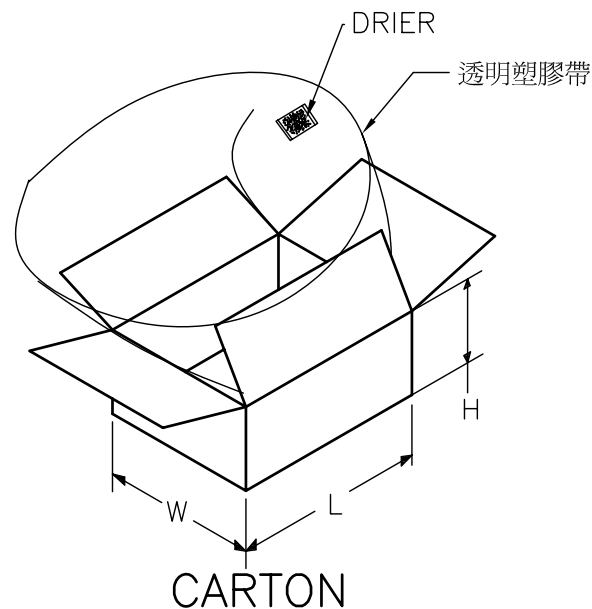

PCAKING MATERIAL

PART NAME	PART NO.	DIM.(LxWxH)/mm	QUANTITY
TRAY CASE	TR-041	330X220X9	25
TRAY COVER	TR-041	330X220X9	1
BIG CARTON	BC-021	355X250X200	1

PCAKING CAPACITY

PART NO.	PCS/TR	PCS/BC
LVC-HS32-20	140PCS/TR	3500PCS/BC

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.35

.X ± 0.25

.XX ± 0.15

.XXX ± 0.05

ANG $\pm 3^\circ$

PPOJECTION

照片框

ORDER INFORMATION

LVC-HS32-20-LF
SERIES | | | LEADFREE
| | | 20WAY
| | | 32~36AWG
| | | SOLDER
| | | HOUSING

DESCRIPTION: