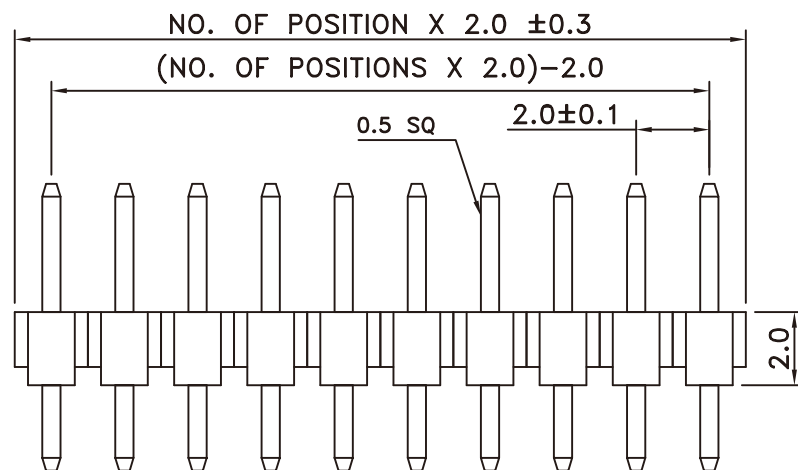


P.C.B. LAYOUT

Specifications:

Current rating:1 Amps

Dielectric Withstanding:AC 500V

Operating Temperature:−25°C ~ +105°C

Contact resistance:20mohm max.

Insulation resistance:5,000Mohm min.

Materials:

Insulator:Polyester(UL94V-0)

Contact material:Brass

Plating:Gold flash

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.20
.XX ± 0.15
.XXX ±
ANG ±

P PROJECTION



ORDER INFORMATION

M-D-1Xxx-LF
SERIES | LEADFREE
1X02:02WAY
1X40:40WAY
DIP 180°

DESCRIPTION: 2.0MM PIN HEADER SINGLE ROW STRAIGHT TYPE