
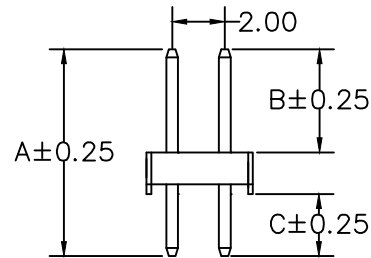


RECOMMENDED P.C.B LAYOUT

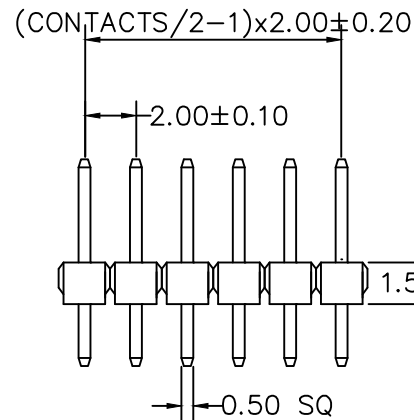

A: 14.10 mm B: 10.10 mm C: 2.50 mm

## MATERIAL

HOUSING : NYLON 6T,UL94V-0

CONTACT : COPPER ALLOYS

PLATED : GOLD-FLASH

COLOR : BLACK

## SPECIFICATION

CURRENT: 1A

OPERATING TEMPERATURE: -55 $\text{U}$  TO +105 $\text{U}$

CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE : 5000 MEGAOHMS MIN

DIELECTRIC STRENGTH : 1000 VAC MIN

| CONTACTS | 2X21 |
|----------|------|
| 2X2      | 2X22 |
| 2X3      | 2X23 |
| 2X4      | 2X24 |
| 2X5      | 2X25 |
| 2X6      | 2X26 |
| 2X7      | 2X27 |
| 2X8      | 2X28 |
| 2X9      | 2X29 |
| 2X10     | 2X30 |
| 2X11     | 2X31 |
| 2X12     | 2X32 |
| 2X13     | 2X33 |
| 2X14     | 2X34 |
| 2X15     | 2X35 |
| 2X16     | 2X36 |
| 2X17     | 2X37 |
| 2X18     | 2X38 |
| 2X19     | 2X39 |
| 2X20     | 2X40 |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
.X ± 0.38  
.XX ± 0.25  
.XXX ±  
ANG ± 5°

照片框

## ORDER INFORMATION

M-D1510125-2Xxx-LF

SERIES

DIP 180°

LEADFREE

2X02:04 WAY

2X40:80 WAY

DIP 2.5mm

CONTACT 10.1mm

BASE 1.5mm

DESCRIPTION: