



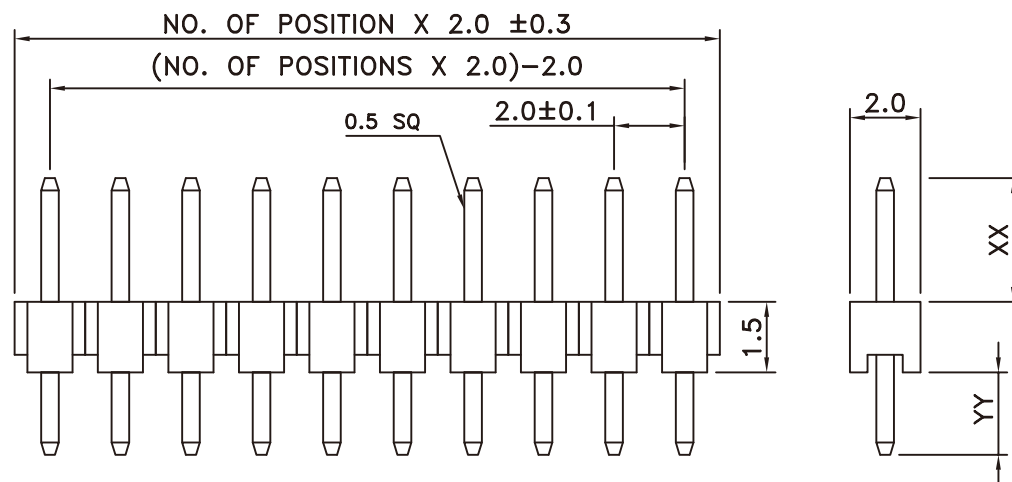

Specifications:
 Current rating:1 Amps
 Dielectric Withstanding:AC 500V
 Operating Temperature:-25°C ~ +105°C
 Contact resistance:20mohm max.
 Insulation resistance:5,000Mohm min.

Materials:
 Insulator:Polyester(UL94V-0)
 Contact material:Brass
 Plating:Gold flash

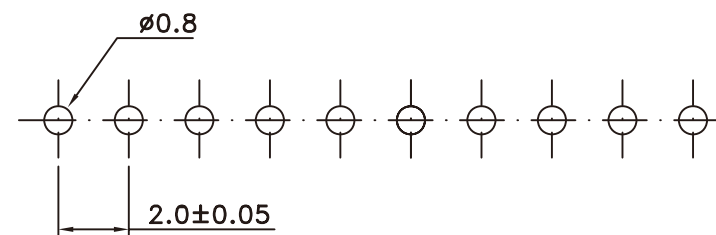

P.C.B. LAYOUT

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4


TOLERANCES ARE

X, ±
 .X ± 0.20
 .XX ± 0.15
 .XXX ±
 ANG ±

P PROJECTION



ORDER INFORMATION

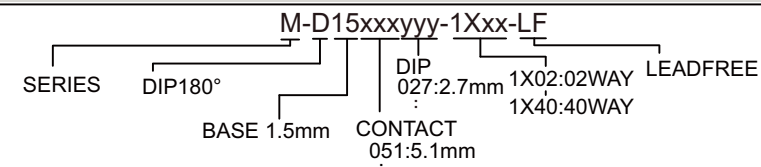

DESCRIPTION: 2.0MM PIN HEADER SINGLE ROW STRAIGHT TYPE