
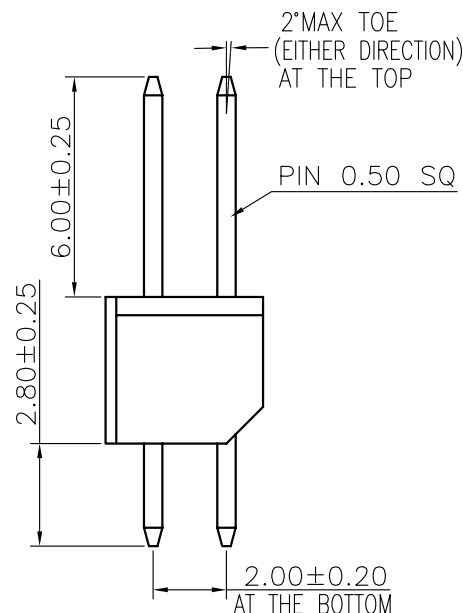
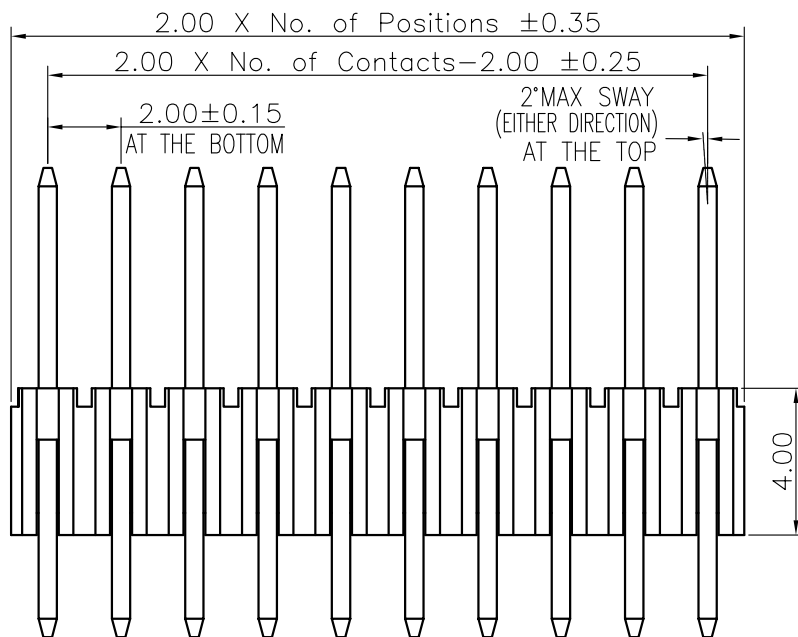


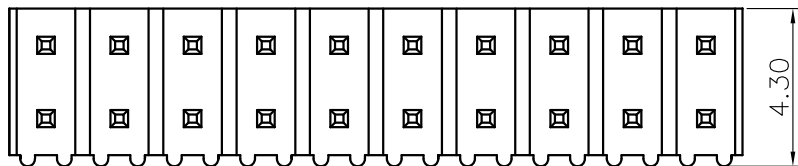

Specifications

Current Rating: 2.0Amp

Insulation Resistance: 1000MΩMin.

Dielectric Withstanding Voltage: 500VAC

Contact Resistance: 20mΩMax.

Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass

Insulator Material: High Temperature


Thermoplastic, UL 94V-0 Nylon

(Halogen Free) or the equivalent material

Recommended P.C.Board

Layout

(Tolerance: ±0.05)

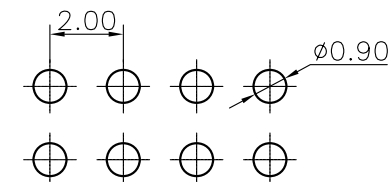

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

M-DT4060-2Xxx-LF

SERIES
DIP 180°
TIN
LEADFREE
2X02:04WAY
2X40:80WAY
CONTACT 6.0mm
BASE 4.0mm

DESCRIPTION: 2.00 PIN HEADER DUAL ROWS DIP TYPE CONNECTOR