

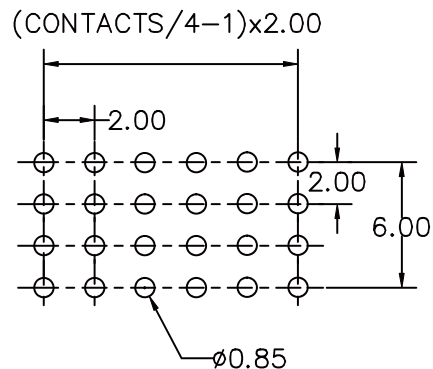
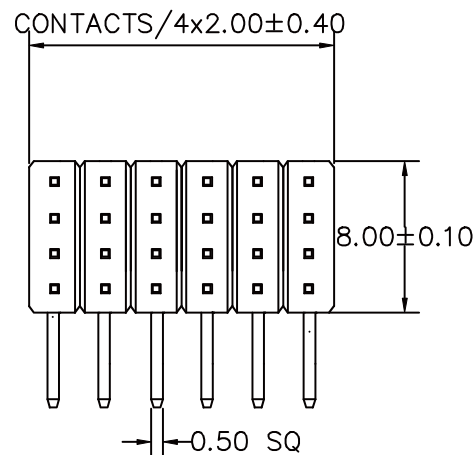


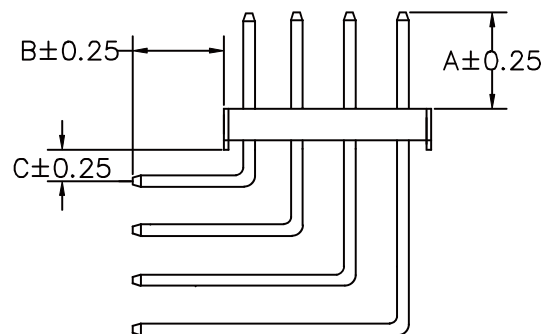

RECOMMENDED P.C.B LAYOUT

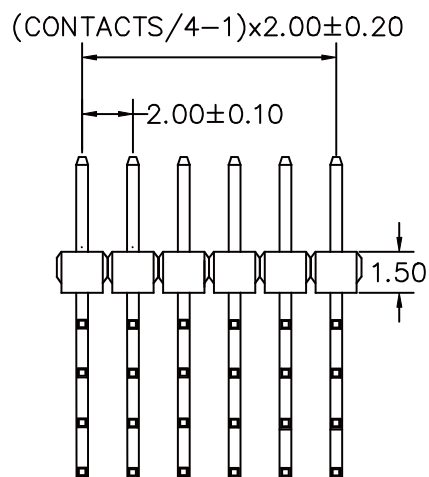

A: 3.20 mm B: 3.05 mm C: 1.27 mm

CONTACTS	
4X2	4X16
4X3	4X17
4X4	4X18
4X5	4X19
4X6	4X20
4X7	4X21
4X8	4X22
4X9	4X23
4X10	4X24
4X11	4X25
4X12	4X26
4X13	4X27
4X14	4X28
4X15	4X29
4X16	4X30

MATERIAL

HOUSING : THERMOPLASTIC UL94V-0

CONTACT : COPPER ALLOYS

SPECIFICATION

CURRENT: 3A

OPERATING TEMPERATURE: -55°C TO +105°C

CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE : 1000 MEGAOHMS MIN

WITHSTANDING VOLTAGE: AC 1000V RMS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ±
ANG ± 5°

照片框

ORDER INFORMATION

M-R15133230T-4Xxx-LF

SERIES | DIP 90° | BASE 1.5mm | R/A 1.27mm | TIN | DIP 3.05mm | CONTACT 3.2mm | LEADFREE | 4X02:08WAY | 4X30:120WAY

DESCRIPTION: