

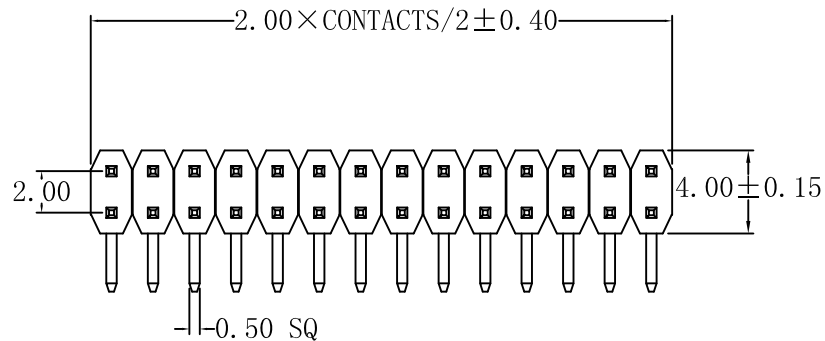
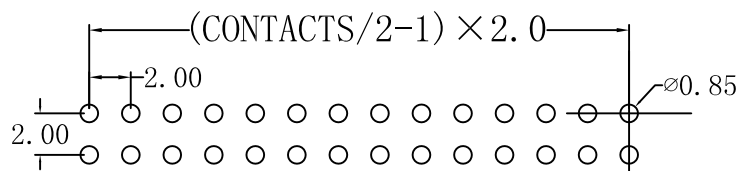


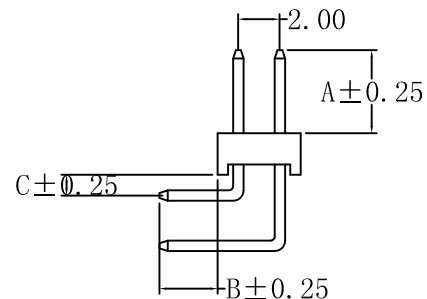

MATERIAL
 HOUSING: PBT, UL94V-0
 CONTACT: COPPER ALLOYS
 PLATED : GOLD-FLASH
 COLOR : BLACK

SPECIFICATION
 CURRENT : 2A
 OPERATING TEMPERAURE : $-55^{\circ} \text{ C TO } +105^{\circ} \text{ C}$
 CONTACT RESISTANCE : 20 MILLIOHMS MAX
 INSULATION RESISTANCE: 1000 MEGAOHMS MIN
 WITHSTAND VOLTAGE : 500 V AC MIN

CONTACTS	
	2×21
2×2	2×22
2×3	2×23
2×4	2×24
2×5	2×25
2×6	2×26
2×7	2×27
2×8	2×28
2×9	2×29
2×10	2×30
2×11	2×31
2×12	2×32
2×13	2×33
2×14	2×34
2×15	2×35
2×16	2×36
2×17	2×37
2×18	2×38
2×19	2×39
2×20	2×40

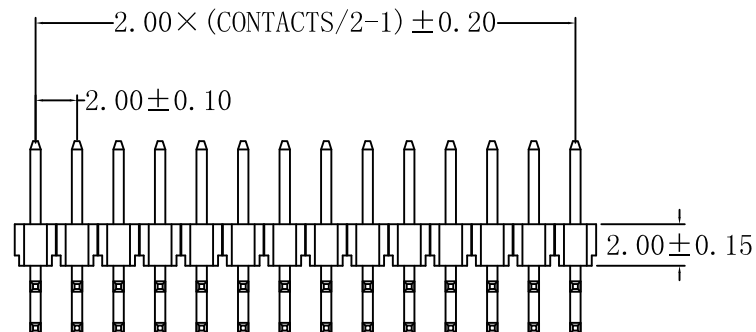

RECOMMENDED P. C. B LAYOUT

A: 6.00 mm B: 2.80 mm C: 1.00 mm

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
 .X ± 0.38
 .XX ± 0.25
 .XXX ±
 ANG ± 5°

PPOJECTION

照片框

ORDER INFORMATION

M-R20106028-2Xxx-LF
 SERIES LEADFREE
 2X02:04WAY
 2X40:80WAY
 DIP 90°
 BASE 2.0mm
 R/A 1.0mm
 CONTACT 6.0mm

DESCRIPTION: PIN HEADER 2.0 PH 90° H:2.0 2*XXPIN