

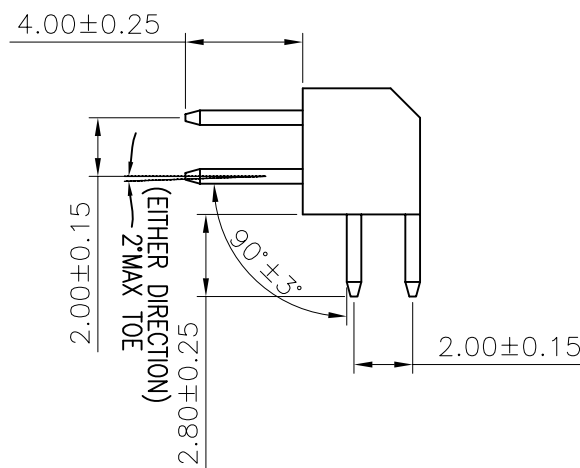
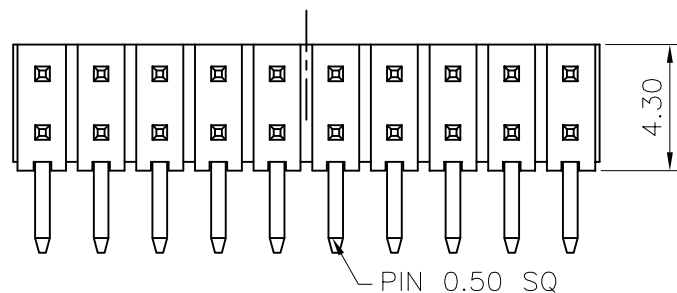


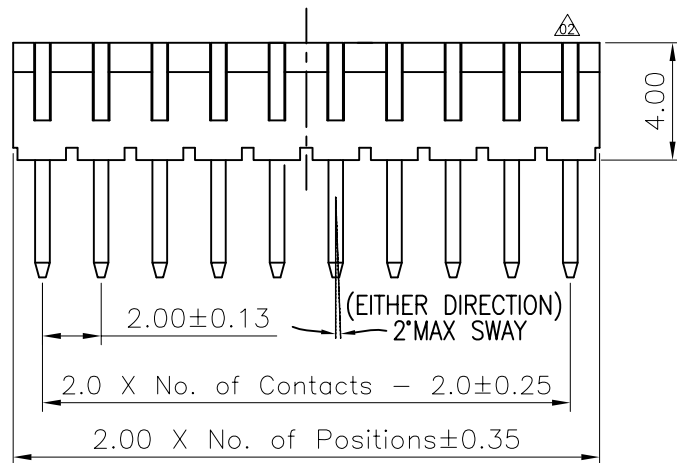

Recommended P.C.Board
Layout
(Tolerance:±0.05)

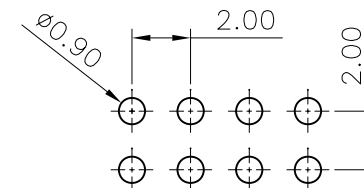

Specifications
Current Rating:2Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:500VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Brass
Insulator Material:High Temperature
Thermoplastic, UL 94V-0 Nylon or the
equivalent material

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
ANG ±



ORDER INFORMATION

M-RT4-2Xxx-LF
SERIES LEADFREE
2X02:04WAY
2X40:80WAY
THICK 4.0mm
DIP 90°

DESCRIPTION: 2.00 HEADER MALE DUAL ROWS TYPE T/H ASSEMBLY