

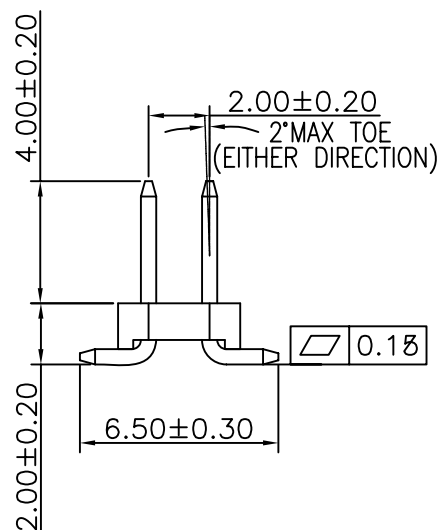
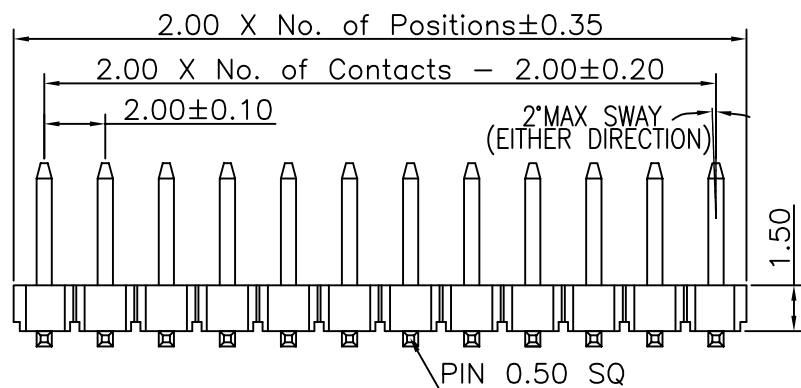


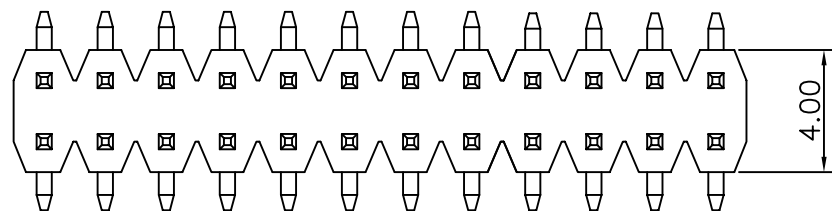

Recommended P.C.Board
Layout
(Tolerance: ±0.05)

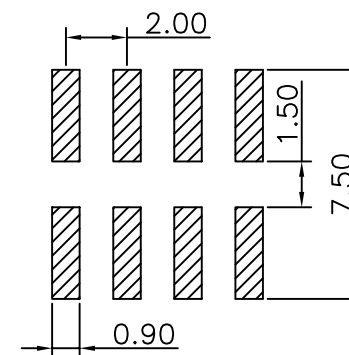

Specifications
Current Rating: 2Amp
Insulation Resistance: 1000MΩMin.
Dielectric Withstanding Voltage: 500VAC
Contact Resistance: 20mΩMax.
Operating Temperature: -40°C to +105°C
Materials
Contact Material: Brass
Insulator Material: High Temperature
Thermoplastic, UL 94V-0 Nylon 6T or
the equivalent material

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

M-V20X40-2Xxx-LF
SERIES
180°SMT
LEADFREE
2X02:04WAY
2X40:80WAY
CONTACT 4.0mm
NON POST
HIGH 2.0mm

DESCRIPTION: 2.00 PIN HEADER DUAL ROWS SMT TYPE BASE 1.50H