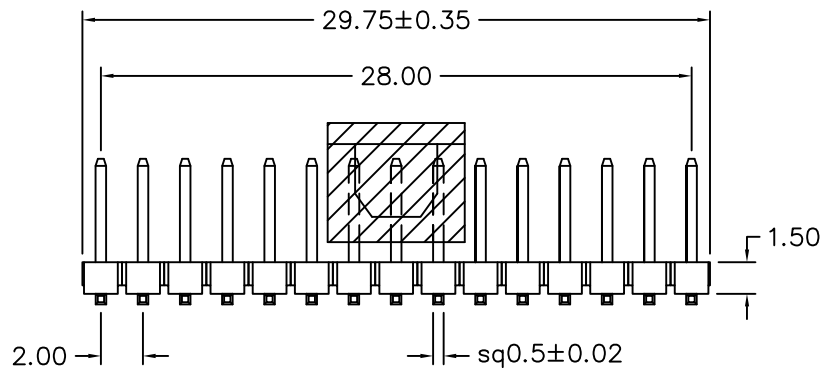
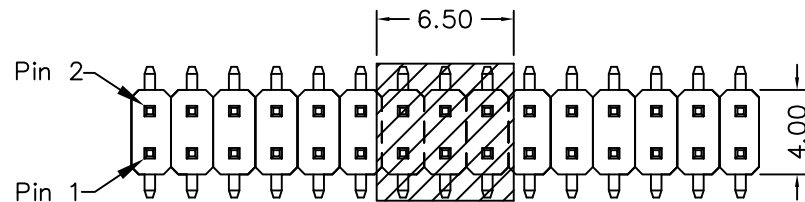


Recommended P.C.B Layout

## MATERIAL

Insulator: NY6T UL94-V0

Contact Pin : Brass

## SPECIFICATION


Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature: -40°C to +105°C

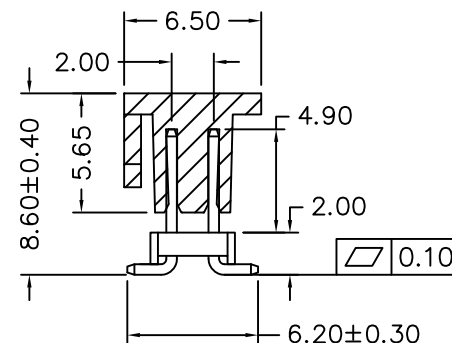

照片框

## RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ±  
ANG ± 3°

PPOJECTION

煜倫股份有限公司

www.morethanall.com

## ORDER INFORMATION

M-V20X49C-2X15-LF  
SERIES 180°SMT  
CAP 30 WAY  
CONTACT 4.9mm  
NON POST  
HIGH 2.0mm  
LEADFREE

DESCRIPTION: PIN HEADER 2.00\*2.00mm SMT S/T TYPE , DUAL ROWS CAP