

MATERIAL

CAP Insulator : NY6T

Housing Insulator : NY6T

Contact Pin : Brass




SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

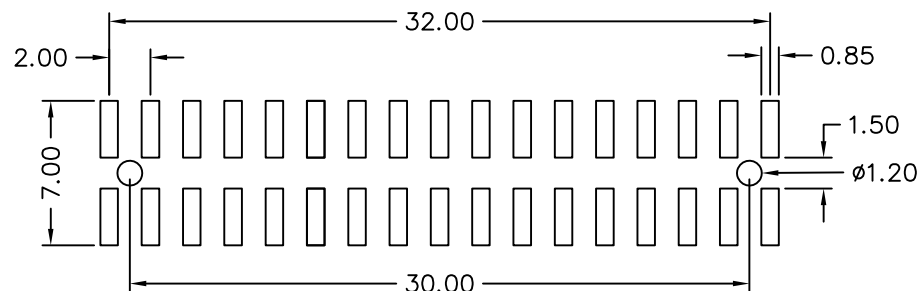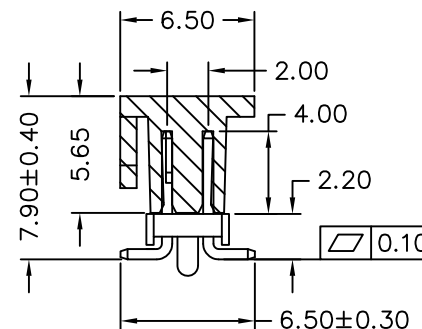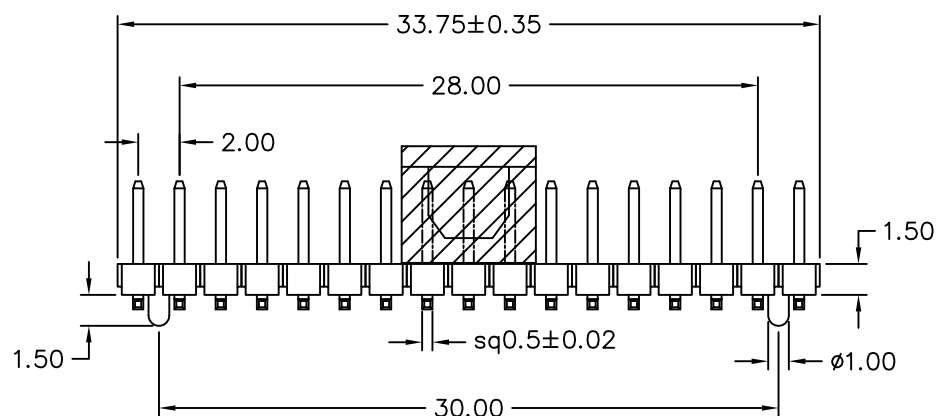

Recommended P.C.B Layout

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ± 0.30

.XX ± 0.20

.XXX ±

ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

M-V22PC-2X17-LF

SERIES
CAP
POST
HIGH 2.2mm
180° SMT
34 WAY
LEADFREE

DESCRIPTION: PIN HEADER 2.00*2.00mm SMT S/T TYPE, DUAL ROWS CAP