

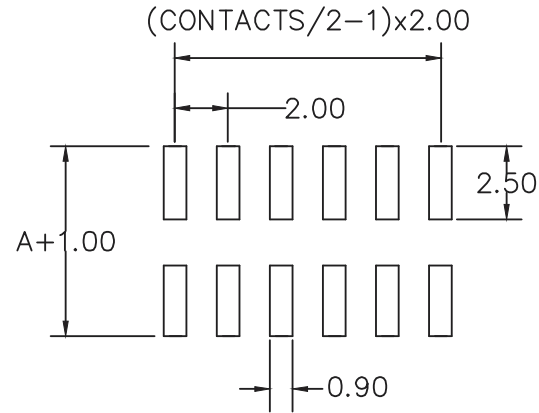
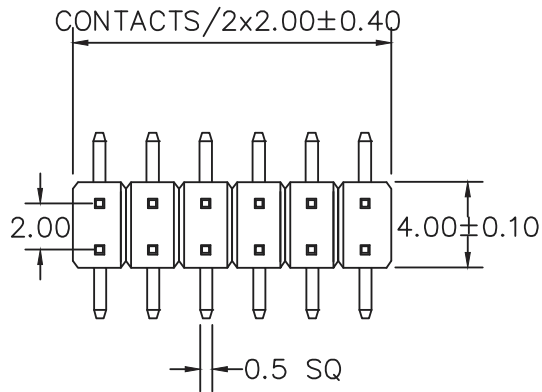




RECOMMENDED P.C.B LAYOUT

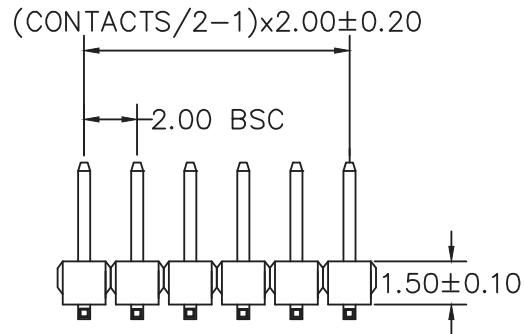

A: 6.50 mm B: 5.60 mm C: 2.20 mm

MATERIAL

HOUSING : THERMOPLASTIC UL94V-0

CONTACT : COPPER ALLOYS

SPECIFICATION

CURRENT: 1A

OPERATING TEMPERATURE: -55°C TO +105°C

CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE : 5000 MEGAOHMS MIN

DIELECTRIC STRENGTH : 1000 VAC MIN

CONTACTS	
2X21	
2X22	
2X23	
2X24	
2X25	
2X26	
2X27	
2X28	
2X29	
2X30	
2X31	
2X32	
2X33	
2X34	
2X35	
2X36	
2X37	
2X38	
2X39	
2X40	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

M-V22X56-2Xxx-LF
SERIES 2X02:04WAY
180°SMT 2X40:80WAY
NON POST CONTACT 5.6mm
HIGH 2.2mm

DESCRIPTION: