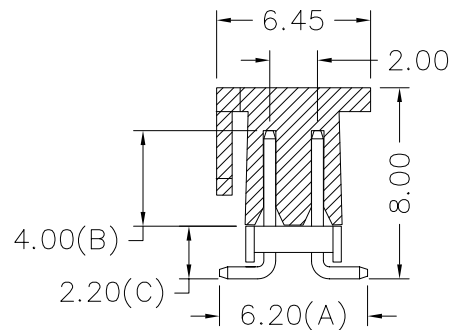
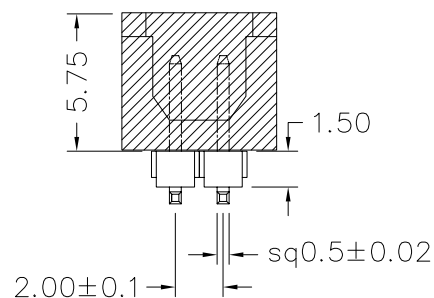
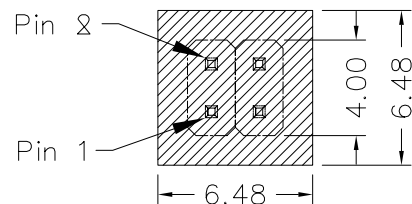


Recommended P.C.B Layout

MATERIAL

Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

照片框

ORDER INFORMATION

M-V22XC-2X02-LF
SERIES CAP 04WAY LEADFREE
NON POST
HIGH 2.2mm
180°SMT

DESCRIPTION: PIN HEADER 2.00*2.00mm SMT S/T TYPE, DUAL ROWS CAP+TAPE REEL