

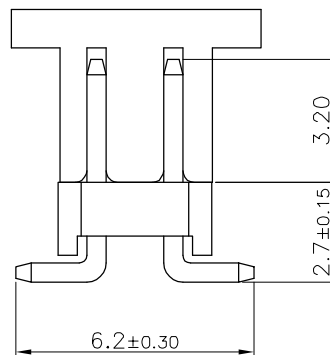
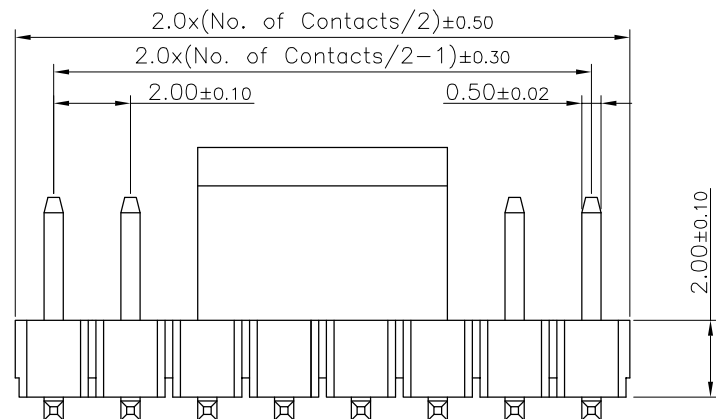


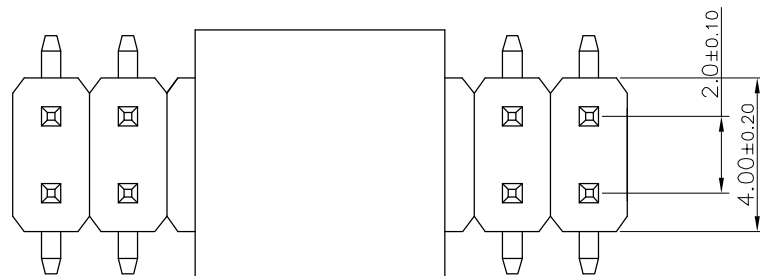

Specifications:
 Current Rating: 2.0A AC,DC
 Voltage Rating: 250V AC,DC
 Contact Resistance: 20m ohm.Max
 Insulation Resistance: 1000M ohm.Min
 Withstanding Voltage: 500V AC/Minute
 Operating Temperature Range: -40°C ~ +105°C

Material And Finish:
 Insulator: Nylon 6T UL94V-0
 Insulator Color: Black
 Contact: Brass
 Plated: Gold/Tin/Selective Gold Plated

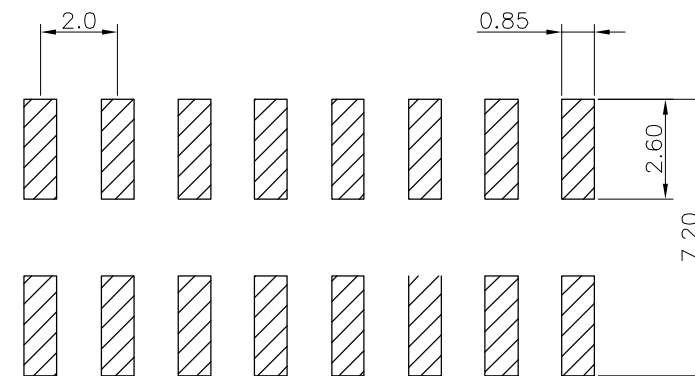

P.C.B Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ±
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

M-V27X32C-2Xxx-LF
 SERIES LEADFREE
 2X02:02 WAY
 2X40:80 WAY
 180°SMT CAP
 HIGH 2.7mm CONTACT 3.2mm
 NON POST

DESCRIPTION: 2.0mm Pin Header SMD Type Double Rows