

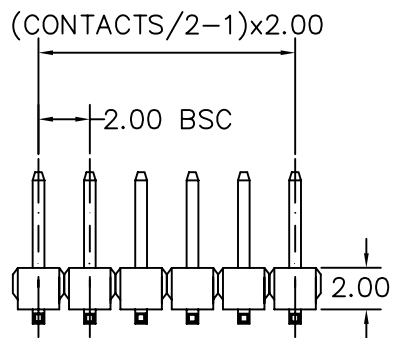
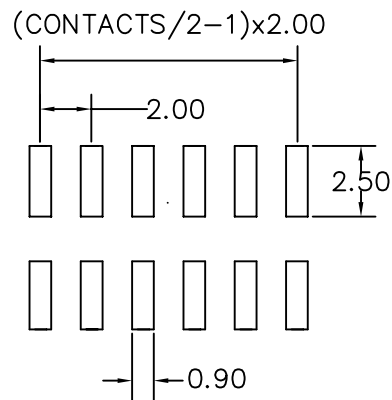


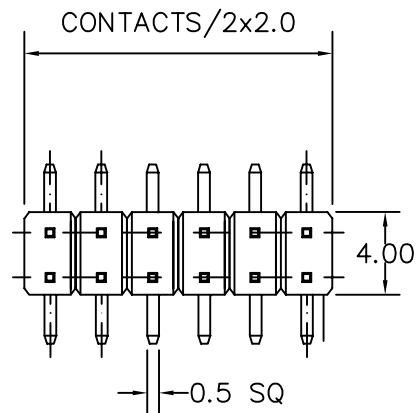

RECOMMENDED P.C.B LAYOUT



A: 6.20 mm B: 3.48 mm C: 2.70 mm

MATERIAL

HOUSING : THERMOPLASTIC UL94V-0

CONTACT : COPPER ALLOYS

SPECIFICATION

CURRENT: 1A

OPERATING TEMPERATURE: -55°C TO +105°C

CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE : 5000 MEGAOHMS MIN

DIELECTRIC STRENGTH : 1000 VAC MIN

DURABILITY : 100 CYCLES

RETENTION FORCE : 700g MIN

FINISH

CONTACT PLATING SEE ORDER INFORMATION

CONTACTS	2X11	2X21	2X31
2X2	2X12	2X22	2X32
2X3	2X13	2X23	2X33
2X4	2X14	2X24	2X34
2X5	2X15	2X25	2X35
2X6	2X16	2X26	2X36
2X7	2X17	2X27	2X37
2X8	2X18	2X28	2X38
2X9	2X19	2X29	2X39
2X10	2X20	2X30	2X40

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

M-V27X35-2Xxx-LF

SERIES

180°SMT

LEADFREE

2X02:02 WAY

2X40:80 WAY

CONTACT 3.48mm

NON POST

HIGH 2.7mm

DESCRIPTION: PIN HEADER 2.0 SMD