
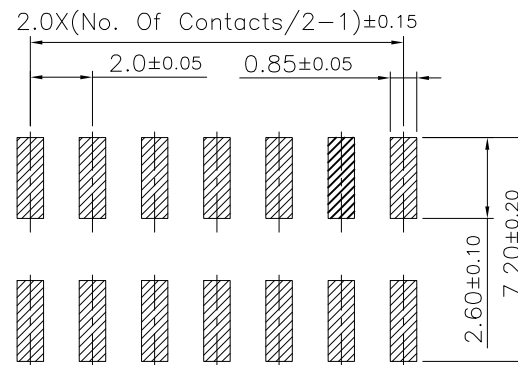
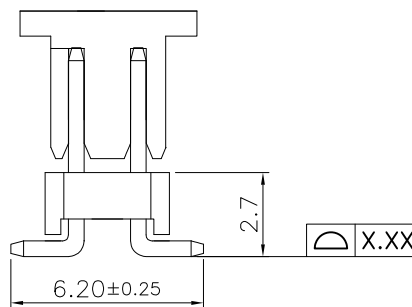


Pin No.	Flatness
-30P	0.10
32-40P	0.12
42-60P	0.15
62-80P	0.20

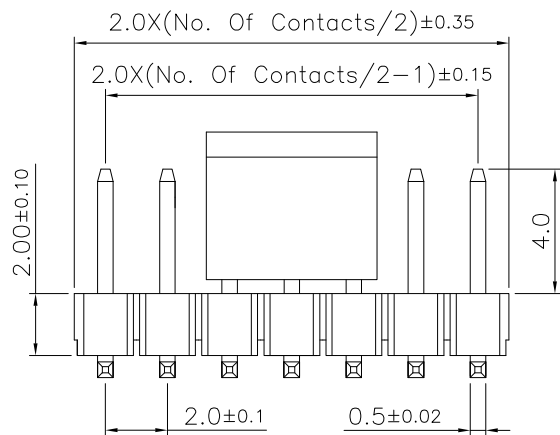

P.C.B Layout

Specifications:

Current Rating:2.0A AC/DC  
 Voltage Rating:250V AC/DC  
 Contact Resistance:20m Ohm Max.  
 Insulation Resistance:1000M Ohm Min.  
 Withstanding Voltage:500V AC/Minute  
 Temperature Rating:-40°C To +105°C

Materials and Finish:

Insulator:High Temp Plastic(Nylon 6T UL94V-0)  
 Insulator Color:Black  
 Contact:Copper Alloy  
 Plating:Gold or Tin or Selective Gold Plated

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±  
 .X ± 0.20  
 .XX ± 0.15  
 .XXX ±  
 ANG ±

PJECTION

照片框

ORDER INFORMATION

M-V27X40C-2Xxx-LF  
 SERIES | LEADFREE  
 2X02:04 WAY  
 2X40:80 WAY  
 180°SMT | CAP  
 HIGH 2.7mm | CONTACT 4.0mm  
 NON POST

DESCRIPTION: 2.0mm SMD Pin Header Double Rows

煜倫股份有限公司

www.morethanall.com