


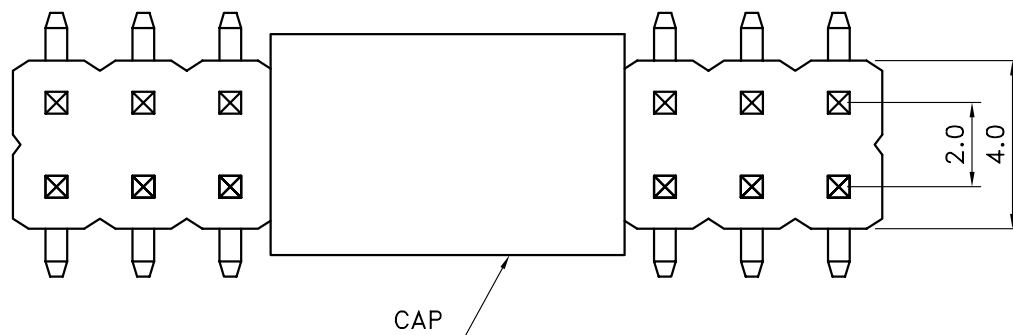

Specifications:

Current rating:1 Amps

Dielectric Withstanding:AC 500V

Operating Temperature:-25°C ~ +260°C

Contact resistance:<20mohm



Insulation resistance:>5,000Mohm min.

Materials:

Insulator:Nylon 6T(UL94V-0)

Contact material:Brass

Plating:Gold flash

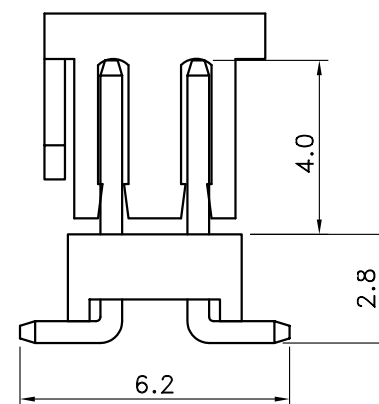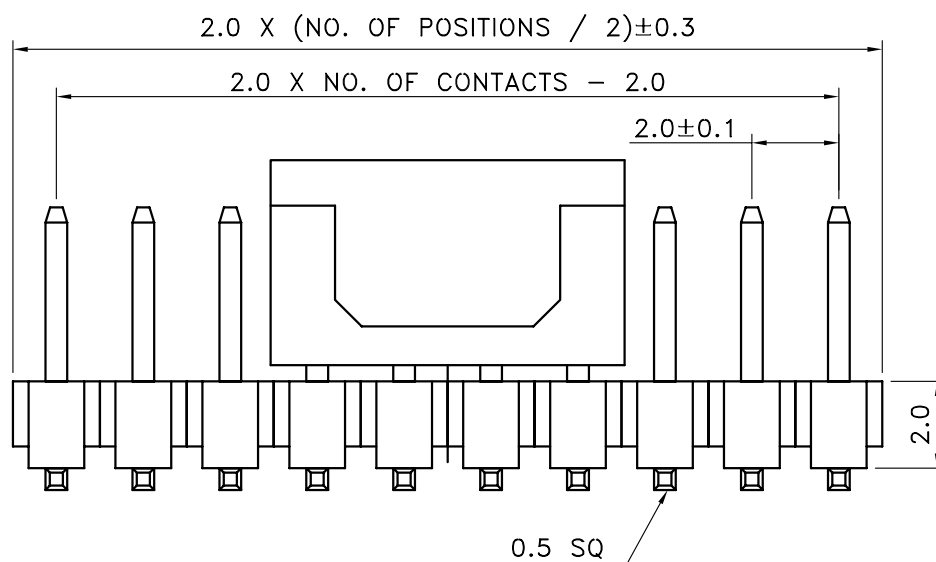

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

M-V28XC-2Xxx-LF
SERIES 2X02:02 WAY LEADFREE
2X40:80 WAY
CAP
180°SMT NON POST
HIGH 2.8mm

DESCRIPTION: 2.0MM PIN HEADER SMTYPE