

Recommended P.C.B Layout  
(PCB TOLERANCE ±0.05)

**MATERIAL**

Contact Pin : Brass

**SPECIFICATION**

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 15mΩMax.

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

POLES	DIM E	DIM F	POLES	DIM E	DIM F	POLES	DIM E	DIM F
6	10.00	12.00	21	40.00	42.00	36	70.00	72.00
7	12.00	14.00	22	42.00	44.00	37	72.00	74.00
8	14.00	16.00	23	44.00	46.00	38	74.00	76.00
9	16.00	18.00	24	46.00	48.00	39	76.00	78.00
10	18.00	20.00	25	48.00	50.00	40	78.00	80.00
11	20.00	22.00	26	50.00	52.00	41	80.00	82.00
12	22.00	24.00	27	52.00	54.00	42	82.00	84.00
13	24.00	26.00	28	54.00	56.00	43	84.00	86.00
14	26.00	28.00	29	56.00	58.00	44	86.00	88.00
15	28.00	30.00	30	58.00	60.00	45	88.00	90.00
16	30.00	32.00	31	60.00	62.00	46	90.00	92.00
17	32.00	34.00	32	62.00	64.00	47	92.00	94.00
18	34.00	36.00	33	64.00	66.00	48	94.00	96.00
19	36.00	38.00	34	66.00	68.00	49	96.00	98.00
20	38.00	40.00	35	68.00	70.00	50	98.00	100.00

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE


SIZE A4

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

P PROJECTION

照片框

**ORDER INFORMATION**

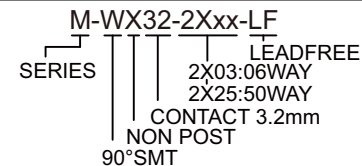

DESCRIPTION: PIN HEADER 2.0\*2.0mm DUAL ROW, HORIZONTAL PIN