

MATERIAL

Insulator : NY6T

Contact Pin : Brass




SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000M Ω Min. at DC 500V

Contact Resistance : 15m Ω Max.

Dielectric Voltage : AC 500V for one minute

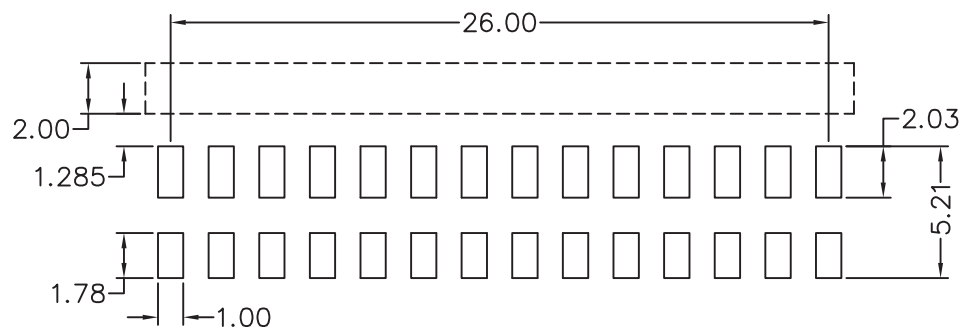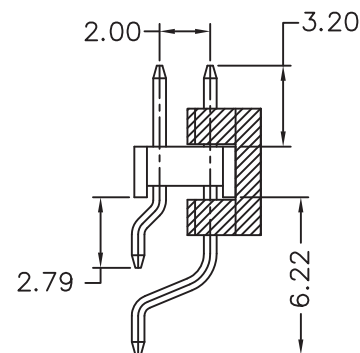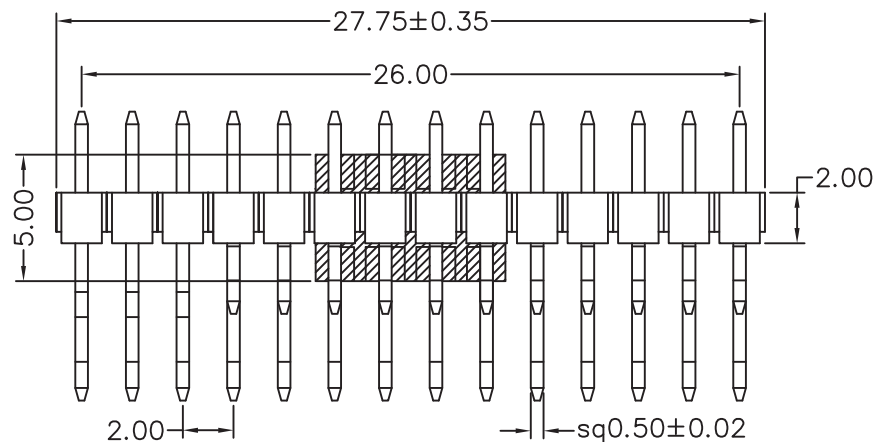

Recommended P.C.B Layout
(PCB TOLERANCE ± 0.05)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X ± 0.30
.XX ± 0.20
.XXX $\pm$
ANG $\pm 3^\circ$

照片框

ORDER INFORMATION

M-WX32C-2X14-LF
SERIES 90°SMT 28WAY CAP CONTACT 3.2mm LEADFREE NON POST

DESCRIPTION: PIN HEADER 2.0*2.0mm DUAL ROW, HORIZONTAL PIN CAP