

Recommended P.C.B Layout

MATERIAL

Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 15mΩMax.

Dielectric Voltage : AC 500V for one minute

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±0.30

UNIT / mm

SCALE 1:1

.XX±0.15

DATE

.XXX±

ANG ±3°

煜倫股份有限公司


www.morethanall.com

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

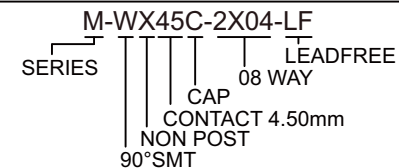

DESCRIPTION: PIN HEADER 2.0*2.0mm DUAL ROW, HORIZONTAL PIN CAP+TUBE