


Specifications

Current Rating: 2Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Copper Alloy
 Insulation Material: Polyester, UL 94V-0
 NYLON-6T

Recommended P.C.Board Layout

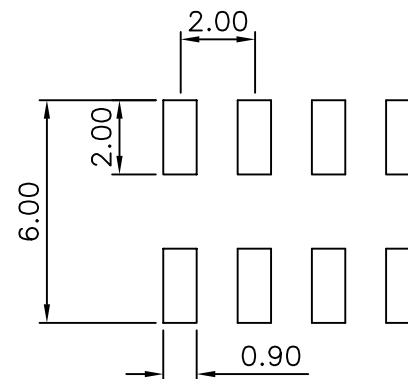

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.38
 .XX ± 0.25
 .XXX ± 0.13
 ANG ±

P PROJECTION

照片框

ORDER INFORMATION

M-WX48-2Xxx-LF
 SERIES | LEADFREE
 2X03:06WAY
 2X25:50WAY
 CONTACT 4.8mm
 NON POST
 90°SMT

DESCRIPTION: 2.0 PIN HEADER DUAL ROWS SMT TYPE BASE 2.0H