


PIN ASSIGNMENT.

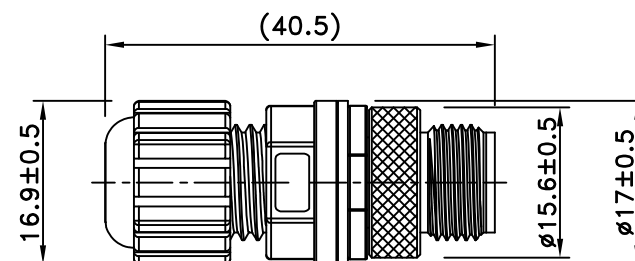

****NOTES:**

1. SCREW NUT: COPPER ALLOY NICKEL PLATED.
2. HOUSING: THERMAL PLASTIC UL94 V-0 BLACK COLOR.
3. CONTACTS: COPPER ALLOY Au PLATED.
4. GLUE: EPOXY BLACK COLOR.
5. GASKET: EPDM BLACK COLOR.
6. COVER: THERMAL PLASTIC UL94 V-0 BLACK COLOR.
7. GLAND: SILICON UL94 V-0 BLACK COLOR.
8. GLAND NUT: THERMAL PLASTIC UL94 V-0 BLACK COLOR.
9. PROTECTION: IP 68.

REMARKS:

CABLE DIAMETER: 4.0 TO 7.0 mm.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

M12-PABK40-08-LF
SERIES | LEADFREE
08 WAY
LONG 40.5mm
BLACK
ASSEMBLY
MALE

DESCRIPTION: M12 A CODE FIELD INSTALLABLE SOLDER MALE 2A 8P