
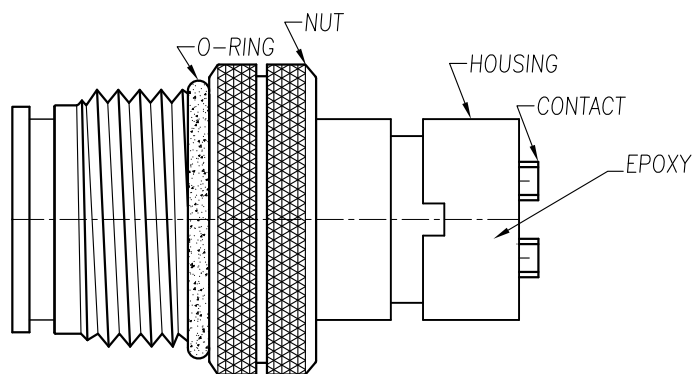
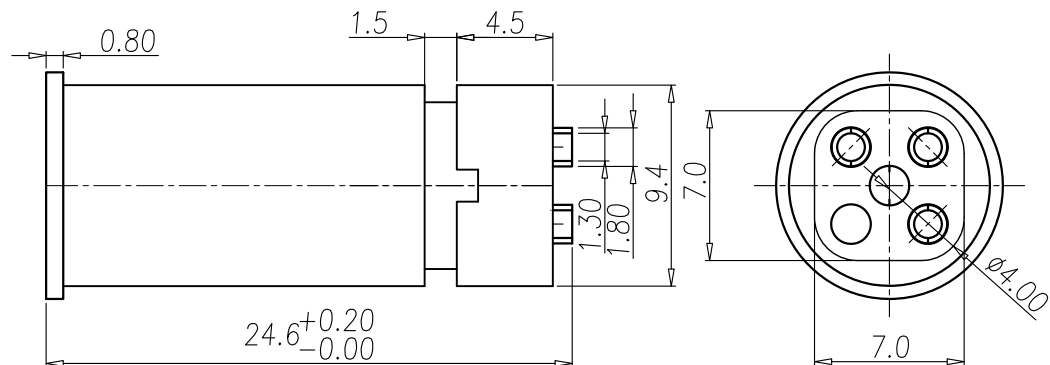
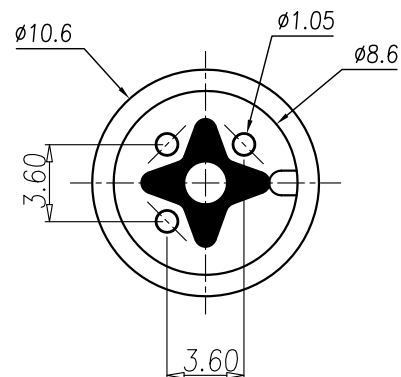


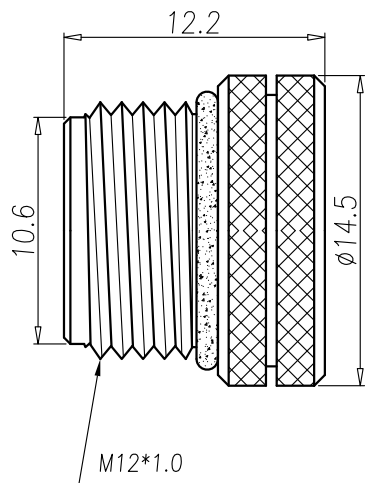

ASSEMBLY

1. MATERIAL :

- 1-1. HOUSING : SEE TABLE A ; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. NUT : BRASS
- 1-4. O-RING :EPDM; COLOR : BLACK
- 1-5. Epoxy Base : EF400A&EF400B. COLOR : BLACK.

2. FINISH :

- 2-1. CONTACT A : 10 MICRO INCHES MIN. GOLD PLATED
UNDER PLATE : NICKEL
- 2-2. NUT : NICKEL PLATED 60u" ~ 100u" OVER ALL

3. ELECTRICAL SPECIFICATION :

- 3-1. Rated current : 5A
- 3-2. Voltage :125V
- 3-3. Water proof: IPX7

4. Environmental :

- 4-1. Operation Temperature : -20℃~85℃

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.20

.X ± 0.10

.XX ± 0.05

.XXX ± 0.03

ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

M12-PS-03-LF
SERIES T LEADFREE
03 WAY
SOLDER
MALE

DESCRIPTION: M12-3(M)線端防水頭