
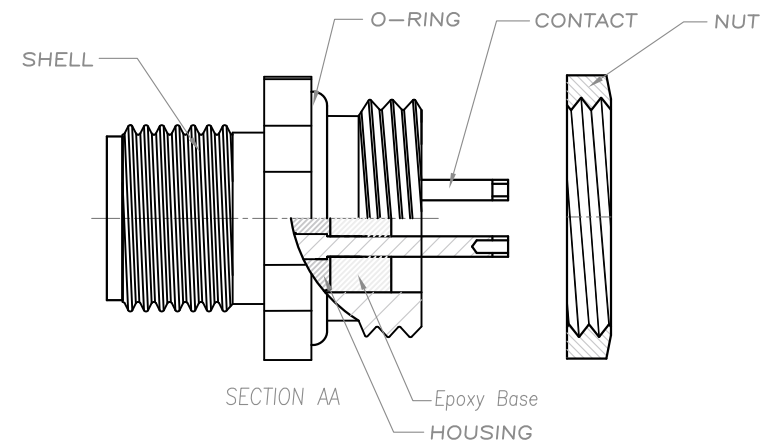


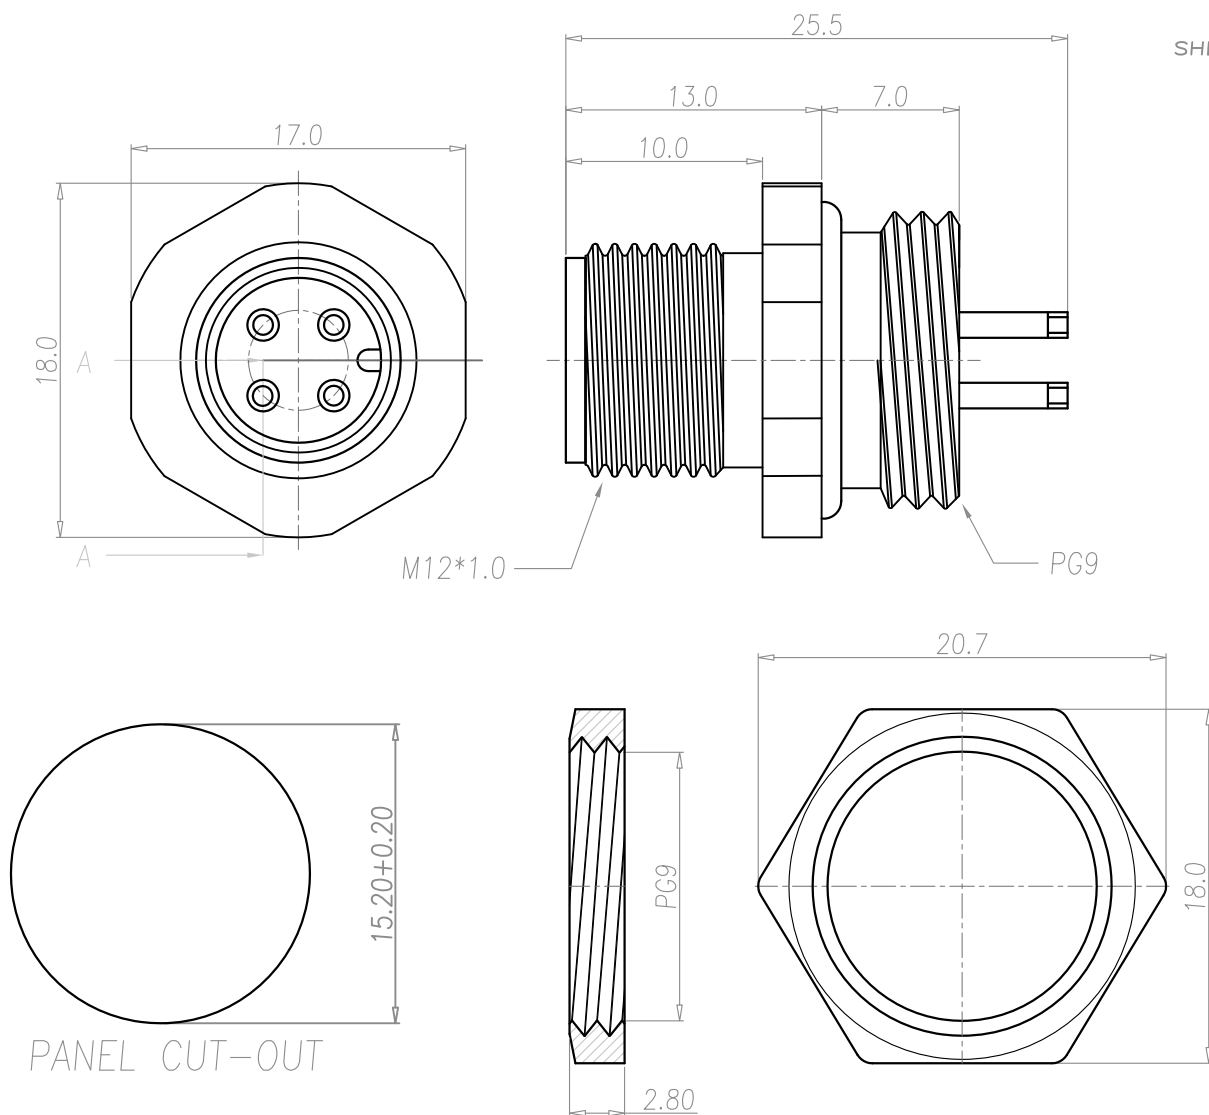

1. MATERIAL :
 - 1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK
 - 1-2. CONTACT : BRASS
 - 1-3. SHELL: BRASS
 - 1-4. NUT : BRASS
 - 1-5. O-RING :NBR; COLOR : BLACK
 - 1-6. EPOXY BASE :EF400A&EF400B ;COLOR: BLACK
2. FINISH :
 - 2-1. CONTACT : 10 MICRO INCHES MIN. GOLD PLATED
UNDER PLATE : NICKEL
 - 2-2. SHELL : NICKEL PLATED 60u" ~ 100u" OVER ALL
3. ELECTRICAL SPECIFICATION :
 - 3-1. Rated current : 5A
 - 3-2. Voltage :125V
 - 3-3. Water proof: IPX8
4. Environmental :
 - 4-1. Operation Temperature : -40 ℃~85℃

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

M12-PSAON-04-LF
SERIES T T T T LEADFREE
MALE NUT RING 04WAY
PANEL FRONT
SOLDER

DESCRIPTION: M12 4P(M) 板端接線(銅殼PG9)+螺母