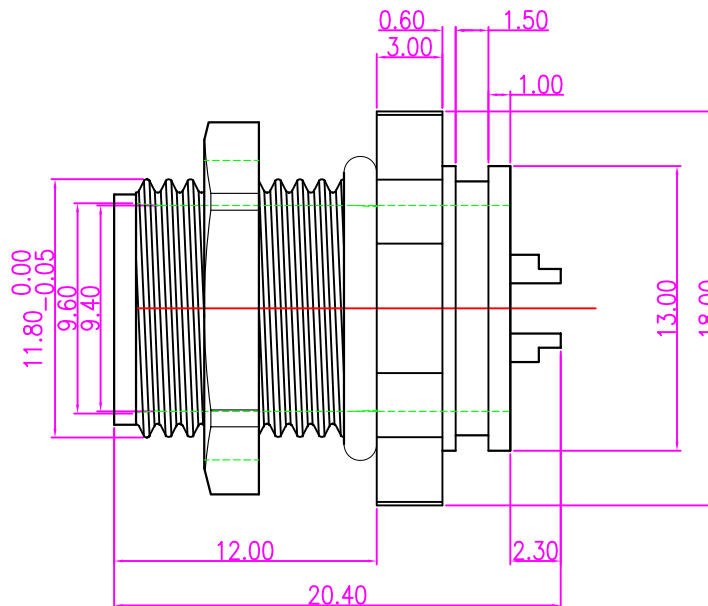
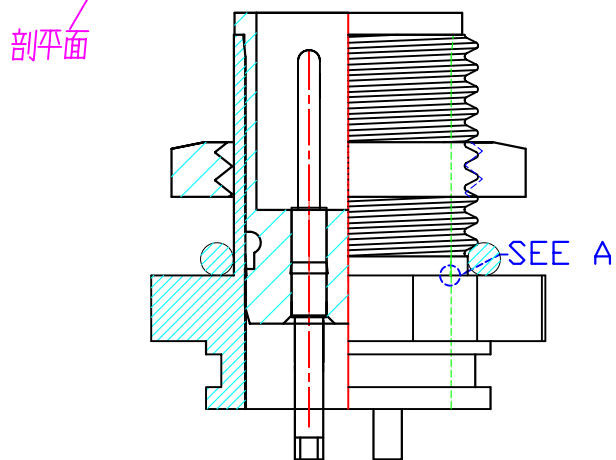
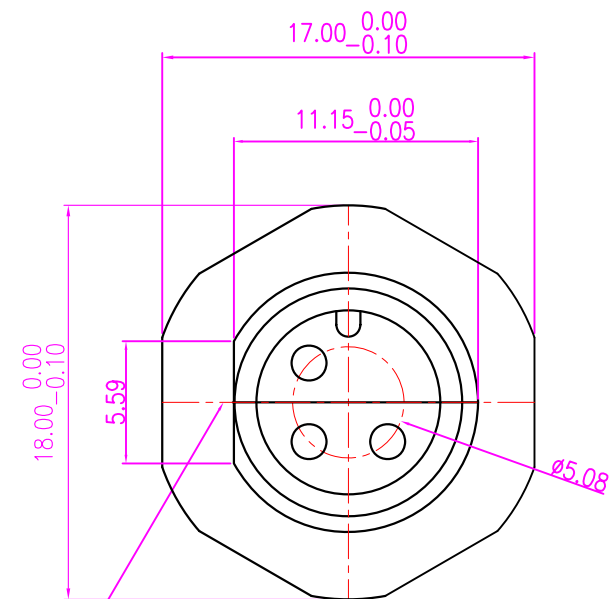


SEE A

NOTE:

材質:

1. 端子: BRASS
2. 銅管: BRASS
3. 膠芯: PBT 30% GLASS FIBER
4. 螺母: BRASS
5. 油封: EPDM

電鍍顏色:

1. 端子: GOLD 10u"
2. 銅管: NICKEL 60u"
3. 膠芯: BLACK
4. 螺母: NI 100u"
5. 油封: BLACK

3. SPECIFICATION

CURRENT: 2 A.

OPERATING TEMPERATURE: -20° C TO 105° C.

INSULATION RESISTANCE: 1000 MEGAOHMS MIN.

DIELECTRIC STRENGTH: 500V AC MIN.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

M12-PSPBNO-03-LF
SERIES | | | | LEADFREE
| | | | 03WAY
| | | | RING
MALE | | NUT
| | | | PANEL BACK
| | | | SOLDER

DESCRIPTION: 防水頭 3PIN(M)鎖板式(洗單邊)