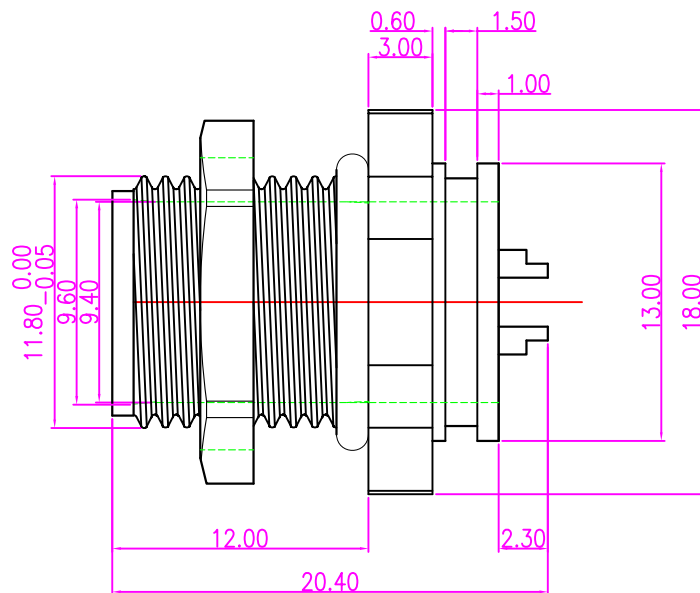
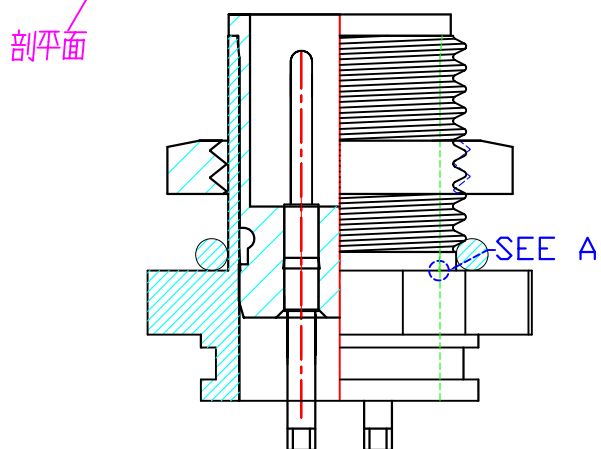
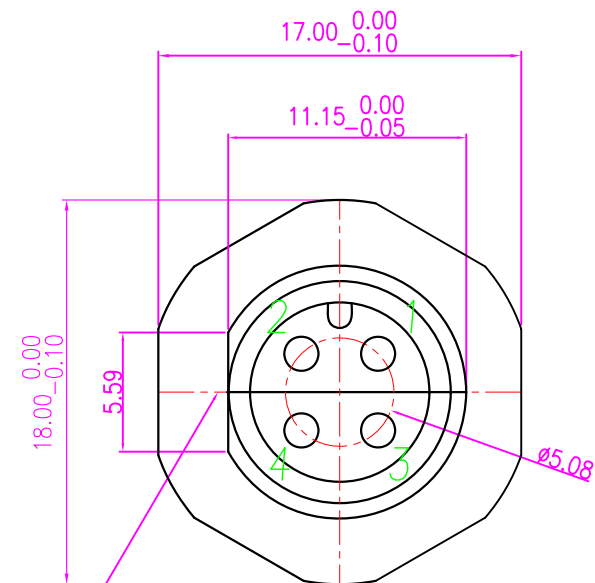


SEE A

NOTE:

材質:

- 1.端子: BRASS
- 2.銅管: BRASS
- 3.膠芯: PBT 30% GLASS FIBER
- 4.螺母: BRASS
- 5.油封: EPDM

電鍍.顏色:

- 1.端子: GOLD 10u"
- 2.銅管: NICKEL 60u"
- 3.膠芯: BLACK
- 4.螺母: NI 100u"
- 5.油封: BLACK

3. SPECIFICATION

CURRENT: 2 A.
 OPERATING TEMPERATURE: -20° C TO 105° C.
 INSULATION RESISTANCE: 1000 MEGAOHMS MIN.
 DIELECTRIC STRENGTH: 500V AC MIN.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

M12-PSPBNO-04-LF
 SERIES | | | | LEADFREE
 | | | | 04WAY
 | | | | RING
 MALE | | NUT
 | | PANEL BACK
 | | SOLDER

DESCRIPTION: 防水頭 4PIN(M) 銅板式(洗單邊)