
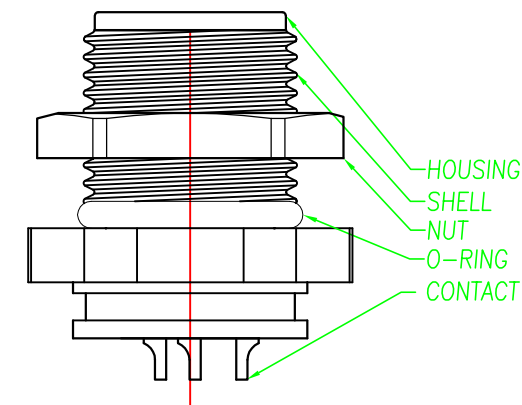


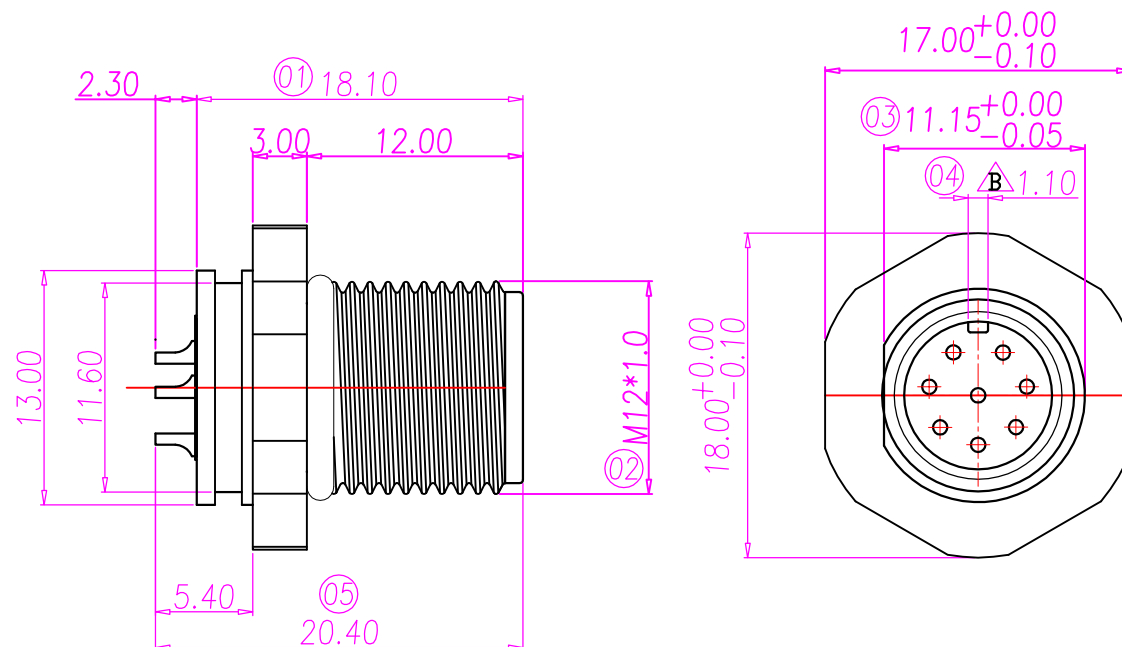

NOTE:

1. MATERIAL :

1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK

1-2. CONTACT : BRASS

1-3. SHELL : BRASS

1-4. NUT : BRASS

1-5. O-RING A : EPDM; COLOR : BLACK

1-6. O-RING B : SILICONE ; COLOR : GREEN. $\triangle B$

2. FINISH :

2-1. CONTACT : SEE TABLE A

2-2. SHELL : NICKEL PLATED OVER ALL

2-3. NUT : NICKEL PLATED OVER ALL

3. ELECTRICAL SPECIFICATION :


3-1. RATED CURRENT : 5A

3-2. VOLTAGE : 125V


3-3. WATER PROOF : IPX7

4. ENVIRONMENTAL:

4-1. OPERATION TEMPERATURE : $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$

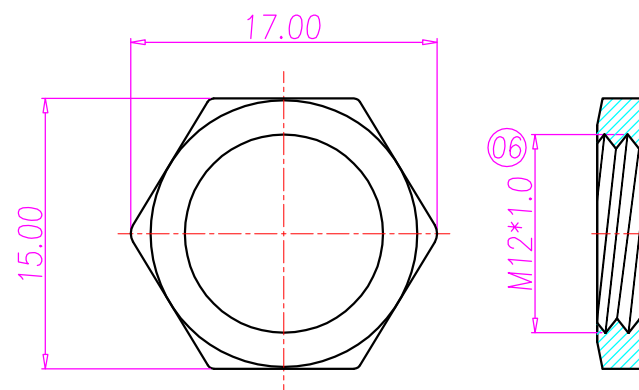

NUT



PANEL CUT-OUT

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.20
.XX $\pm$ 0.10
.XXX $\pm$ 0.05
ANG $\pm$

PPOJECTION

ORDER INFORMATION

M12-PSPBNO-08-LF
SERIES | | | | LEADFREE
| | | | 08WAY
| | | | RING
MALE | | NUT
| | | | PANEL BACK
| | | | SOLDER

DESCRIPTION: 防水頭 8PIN(M)鎖板式(洗單邊)